


PP / PE / PS / ABS Thick-Sheet Single-Screw Extruder

PP / PE / PS / ABS 厚板單螺桿押出機

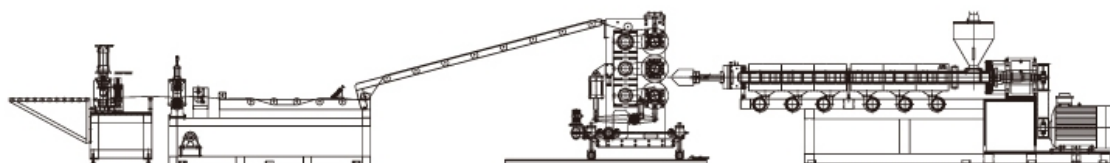

Specification

SPECIFICATION INFORMATION

適用原料	SUITABLE MATERIAL	PP / PE / PS / ABS	
耗電量	POWER CONSUMPTION	kw	242
押出產能 (HDPE)	EXTRUDING OUTPUT(PP)	kg / hr	250 ~ 300
機械占地面積	MACHINE OCCUPANCY AREA	M (L X W X H)	15 X 7 X 3
押出機 EXTRUDER			
螺桿直徑	SCREW DIAMETER	mm	Φ 120
螺桿長徑比	SCREW L/D RATIO	N / A	30 : 1
驅動馬達	DRIVING MOTOR	HP	200
溫度控制區	TEMPERATURE CONTROL	zone	7
模頭 T-DIE			
模頭寬度	T-DIE WIDTH	mm	1400
流道設計	PATH DESIGN	-	衣架歧管式 HYDRODYNAMIC
成品寬度	PRODUCT WIDTH	mm	1200
成品厚度範圍	PRODUCT THICKNESS RANGE	mm	1.0 ~ 5.0
溫度控制區	TEMPERATURE CONTROL	zone	7
成型台 FORMATION			
成型輪寬度	FORMING ROLLER WIDTH	mm	1400
鏡面成型輪直徑	MIRROR ROLLER DIAMETER	mm	Φ 400
鏡面成型輪直徑	MIRROR ROLLER DIAMETER	mm	Φ 400
冷卻成型輪直徑	COOLING ROLLER DIAMETER	mm	Φ 400
驅動馬達	DRIVING MOTOR	HP	5 + 5 + 5
冷凍機	CHILLER	ton X set	7.5 X 1
油式模溫機	OIL TEMP. CONTROLLER	set	3
機台昇降裝置	ELEVATING DEVICE	set	1
輔助引取 TAKE-OFF UNIT			
引取鋼輪	STEEL ROLLER	pcs	1
引取膠輪	RUBBER ROLLER	pcs	1
驅動馬達	DRIVING MOTOR	HP	3
自動切片機 AUTO CUTTING MACHINE			
驅動馬達	DRIVING MOTOR	HP	3
油壓動力單元	HYDRAULIC POWER UNIT	set	1
油壓幫浦	OIL PUMP	HP	2
長度設定裝置	LENGTH SETTING DEVICE	set	1
自動計數器	AUTO COUNTER	set	1

ALL SPECIFICATION CAN BE ALTERED BY ORDER