



大化高分子材料有限公司

TAHAW ENTERPRISE CO., LTD

[Http://www.tahaw.com](http://www.tahaw.com)

2014/2015

White Masterbatches



CHINA FACTORY:

DONG GUAN CITY FENG GANG DA HUA PLASTIC FACTORY

No.45, CHOU SHUI ZHAN RD, FENG GANG TOWN, DONG GUAN CITY,
GUANG DONG PROVINCE, CHINA 523681

TEL:+86-769-82160466 FAX:+86-769-82073273

E-mail:tahaw@tahaw.com

White masterbatch of Rutile Titanium Dioxide


Injection, Extrusion, Blown film				
Item Code	TiO ₂ content	Melting flow Index	Density	Carrier
9625R	TiO ₂ 30% ± 2%	10g/10min	1.65g/cm ³	LDPE
9530R	TiO ₂ 35% ± 2%	10g/10min	1.67g/cm ³	LDPE
9635R	TiO ₂ 40% ± 2%	10g/10min	1.69g/cm ³	LDPE
9640R	TiO ₂ 45% ± 2%	10g/10min	1.73g/cm ³	LDPE
9645R	TiO ₂ 50% ± 2%	10g/10min	1.76g/cm ³	LDPE
9650R	TiO ₂ 55% ± 2%	10g/10min	1.79g/cm ³	LDPE
9655R	TiO ₂ 60% ± 2%	10g/10min	1.84g/cm ³	LDPE
9660R	TiO ₂ 65% ± 2%	10g/10min	1.91g/cm ³	LDPE
9665R	TiO ₂ 70% ± 2%	10g/10min	1.98g/cm ³	LDPE
9670R	TiO ₂ 75% ± 2%	10g/10min	2.03g/cm ³	LDPE
9675R	TiO ₂ 80% ± 2%	10g/10min	2.08g/cm ³	LDPE
Injection, Extrusion, Blown film, Wire drawing, Cast film				
Item Code	TiO ₂ content	Melting flow Index	Density	Carrier
701	TiO ₂ 50% ± 2%	20g/10min	1.71g/cm ³	LDPE
801	TiO ₂ 60% ± 2%	20g/10min	1.91g/cm ³	LDPE
901	TiO ₂ 70% ± 2%	20g/10min	2.03g/cm ³	LDPE
Injection, Extrusion, Blown film, Wire drawing, Cast film				
Item Code	TiO ₂ content	Melting flow Index	Density	Carrier
701S	TiO ₂ 50% ± 2%	50g/10min	1.71g/cm ³	LDPE
801S	TiO ₂ 60% ± 2%	50g/10min	1.91g/cm ³	LDPE
901S	TiO ₂ 70% ± 2%	50g/10min	2.03g/cm ³	LDPE
★ The products above don't contain any fluorescent whitening agent.				

Other related products

Product Name	Item Code	Product description & target	Dosage
Whitening Masterbatch	9125	Used for recycle material, Whitening and brighten up	0.5%~2%
	9126	Used for recycle material, Whitening and brighten up	0.5%~2%
	9126A	Used for recycle material, Whitening and brighten up	0.5%~2%
	9229	Used for raw material, Whitening and brighten up	0.5%~2%
Transparent Filler Masterbatch	CP-9	Don't affect the transparency, tension and reduce the cost.	8%~15%
	CP-9A	Don't affect the transparency, tension and reduce the cost.	8%~15%
	CP-9B	Don't affect the transparency, tension and reduce the cost.	8%~15%
	CP-9C	Don't affect the transparency, tension and reduce the cost.	8%~15%
Anti-Static masterbatch	HE-320	PE Anti-dusting, Anti-static, Surface resistivity ≤ 10 ⁹	2%~4%
	HP-320	PP Anti-dusting, Anti-static, Surface resistivity ≤ 10 ⁹	2%~4%
Anti-Block Masterbatch	MB-980	PE, PP Increase the film smooth, viscous resistance	1%~4%
	MB-980L1	PE, PP Increase the film smooth, viscous resistance	1%~4%
FLEXIBILIZER	A-4085	low temperature resistance and increase the toughness.	2%~4%
Tackifying/Cling Masterbatch	MB-989	Suitable for stretch film, plastic wrap, defense membrane	1%~4%
Anti-Rus Masterbatch	MB-911	Suitable for general metal	2%~4%
	MB-921	Suitable for multi-metal, alloying metal	2%~4%
Anti-aging	PE-930	Suitable for outdoor film, pipe, plate products	1%~4%
	PP-218	Suitable for outdoor film, pipe, plate products	1%~4%
	PP-219	Suitable for outdoor film, pipe, plate products	1%~4%
Anti-Foam MB SP-5(desiccant)	SP-5	Recycling material blown film, pipe	1%~5%
	SP-8	With high dispersion characteristics. Used for Cast film	1%~5%
	SP-5B	Black color, used for recycling material blown film, pipe	1%~5%

White masterbatch of Rutile Titanium Dioxide

Injection, Extrusion, Blown film				
Item Code	TiO2 content	Melting flow Index	Density	Carrier
9512	TiO2 12% ± 2%	10g/10min	1.77g/cm ³	LDPE
9515	TiO2 15% ± 2%	10g/10min	1.79g/cm ³	LDPE
9525	TiO2 25% ± 2%	10g/10min	1.85g/cm ³	LDPE
9527	TiO2 27% ± 2%	10g/10min	1.86g/cm ³	LDPE
9528	TiO2 28% ± 2%	10g/10min	1.88g/cm ³	LDPE
9538	TiO2 38% ± 2%	10g/10min	1.94g/cm ³	LDPE
9540	TiO2 40% ± 2%	10g/10min	1.96g/cm ³	LDPE
Injection, Extrusion, Blown film, Wire drawing, Cast film				
Item Code	TiO2 content	Melting flow Index	Density	Carrier
9550	TiO2 50% ± 2%	15g/10min	1.79g/cm ³	LDPE
9555	TiO2 55% ± 2%	15g/10min	1.84g/cm ³	LDPE
9560	TiO2 60% ± 2%	15g/10min	1.91g/cm ³	LDPE
9565	TiO2 65% ± 2%	15g/10min	1.98g/cm ³	LDPE
9570	TiO2 70% ± 2%	15g/10min	2.03g/cm ³	LDPE
Injection, Extrusion, Blown film, Wire drawing, Cast film				
Item Code	TiO2 content	Melting flow Index	Density	Carrier
9550A	TiO2 50% ± 2%	20g/10min	1.76g/cm ³	LDPE
9575	TiO2 75% ± 2%	20g/10min	2.03g/cm ³	LDPE
9580	TiO2 75% ± 2%	20g/10min	2.03g/cm ³	LDPE
9580B	TiO2 75% ± 2%	20g/10min	2.03g/cm ³	LDPE
Injection, Extrusion, Blown film(Blue White masterbatch)				
Item Code	TiO2 content	Melting flow Index	Density	Carrier
9545	TiO2 45% ± 2%	15g/10min	1.91g/cm ³	LDPE
9085	TiO2 75% ± 2%	15g/10min	2.03g/cm ³	LDPE

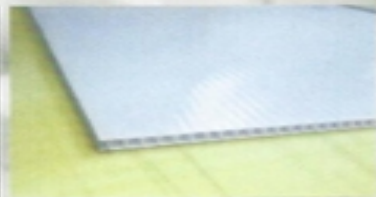



REACH

**(TAIWAN OPERATION : HEADQUARTERS)
TA HAW ENTERPRISE CO.,LTD.**

No.27, JIADONG RD, WAN-PU DIST., TAICHUNG CITY 438, TAIWAN
TEL:+886-4-26805221 FAX:+866-4-26804440 26804510
E-mail:tahaw888@tahaw.com

