


PP Sandwich Thermoforming Sheet Co-Extrusion Machine

PP 壓紋薄膜單螺桿押出機

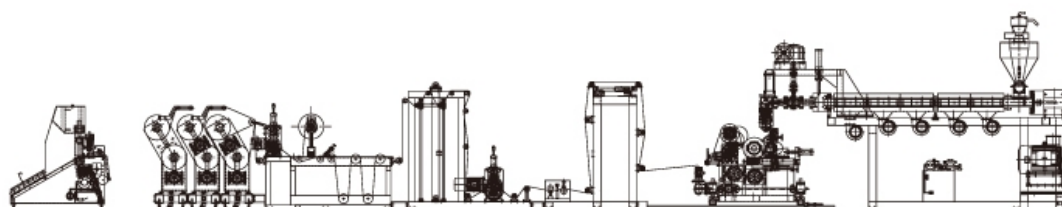

Specification

SPECIFICATION INFORMATION

適用原料	SUITABLE MATERIAL		PP
耗電量	POWER CONSUMPTION	kw	160
押出產能	EXTRUDING OUTPUT (PP)	kg / hr	200
機械占地面積	MACHINE OCCUPANCY AREA	M (L X W X H)	12 X 6 X 3
押出機 EXTRUDER			
螺桿直徑	SCREW DIAMETER	mm	Φ 100
螺桿長徑比	SCREW L / D RATIO	N / A	32 : 1
驅動馬達	DRIVING MOTOR	HP	75
溫度控制區	TEMPERATURE CONTROL	zone	5
模頭 T-DIE			
模頭寬度	T-DIE WIDTH	mm	1800
流道設計	PATH DESIGN	-	衣架歧管式 Hydrodynamic
成品寬度	PRODUCT WIDTH	mm	1600
成品厚度範圍	PRODUCT THICKNESS RANGE	mm	0.06 ~ 0.2
溫度控制區	TEMPERATURE CONTROL	zone	7
成型台 FORMATION			
成型輪寬度	FORMING ROLLER WIDTH	mm	1400
壓花成型輪直徑	EMBOSSING ROLLER DIAMETER	mm	Φ 350
矽膠成型輪直徑	SILICON ROLLER DIAMETER	mm	Φ 160
冷卻成型輪直徑	COOLING ROLLER DIAMETER	mm	Φ 300
驅動馬達	DRIVING MOTOR	HP	3 + 3
精密型風刀	PRECISION AIR-KNIFE	set	1
冷凍機	CHILLER	ton X set	10 X 1
熱水箱	HOT WATER TANK	kw X zone	1.5 X 3
機台昇降裝置	ELEVATING DEVICE	set	1
搖擺裝置 SWING UNIT			
搖擺馬達	SWING MOTOR	HP	1 / 8
中心線展開輪	CENTER EXPANDING ROLLER	pcs	5
輔助引取 TAKE-OFF UNIT			
引取鋼輪	STEEL ROLLER	pcs	1
引取膠輪	RUBBER ROLLER	pcs	1
驅動馬達	DRIVING MOTOR	HP	3
儲料緩衝裝置	STORING & BUFFER UNIT	set	1
自動切片機 AUTO CUTTING MACHINE			
驅動馬達	DRIVING MOTOR	HP	2
油壓單元	HYDRAULIC UNIT	set	1
油壓幫浦	OIL PUMP	HP	2
長度設定裝置	LENGTH SETTING DEVICE	set	1
自動計數器	AUTO COUNTER	set	1
靜電消除器	STATIC ELIMINATOR	set	1

ALL SPECIFICATION CAN BE ALTERED BY ORDER