
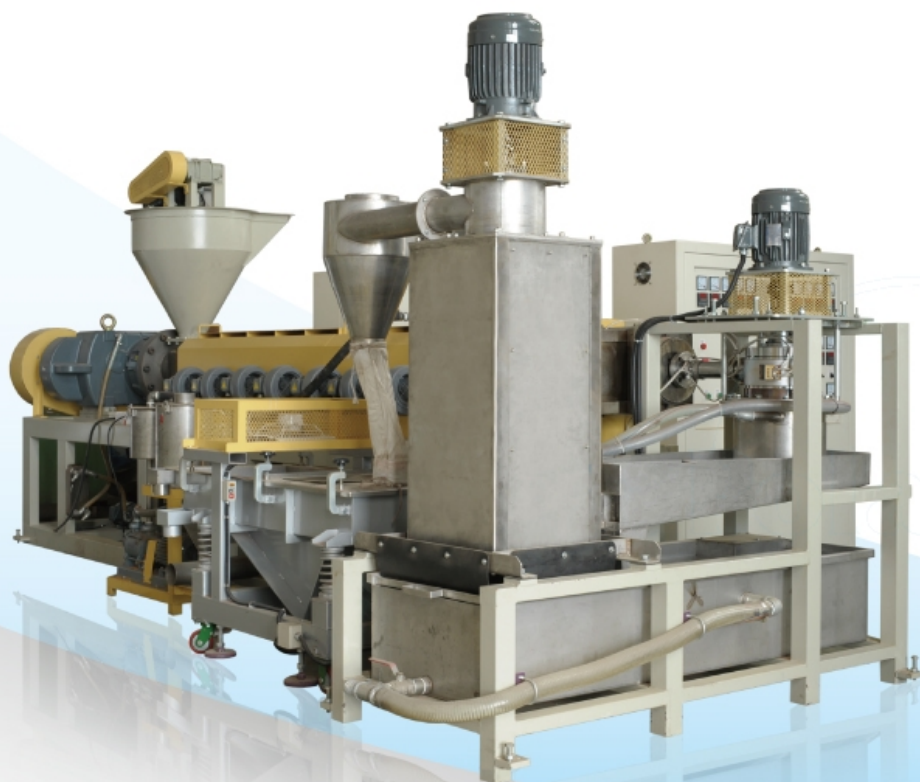


Plastic Recycling Single-Screw Pelletizer

塑料回收單螺桿製粒機

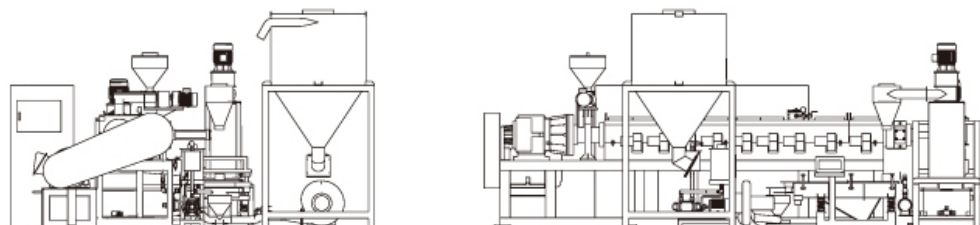

Specification

SPECIFICATION INFORMATION

適用原料	SUITABLE MATERIAL		PP / PE / PS / ABS		
耗 電 量	POWER CONSUMPTION	kw	90	110	132
押出產能 (PP)	EXTRUSION OUTPUT (PP)	kg / hr	120	200	300
機械占地面積	MACHINE OCCUPANCY AREA	M (L X W X H)	9 X 6 X 3		
押出機 EXTRUDER					
螺桿直徑	SCREW DIAMETER	mm	φ 85	φ 100	φ 120
螺桿長徑比	SCREW L / D RATIO	N / A	32 : 1	32 : 1	32 : 1
驅動馬達	DRIVING MOTOR	HP	75	100	125
溫度控制區	TEMPERATURE CONTROL	zone	4	5	6
抽真空系統	VACCUUM SYSTEM	set	1		
強制入料桶	ENFORCED FEEDING LOADER	kg	50		
水環模頭系統 WATER-RING DIE SYSTEM					
製粒孔徑	PELLETIZE DIAMETER	mm	1.6	1.6	1.6
製粒孔	PELLETIZE HOLE	pcs	24	48	48
旋轉刀數	ROTARY CUTTER	pcs	2	4	4
驅動馬達	DRIVING MOTOR	HP	3		
水循環系統 WATER CIRCULTION SYSTEM					
水幫浦	WATER PUMP	HP	1	1	2
儲水桶	WATER-STORAGE TANK	set	1		
離心脫水機 DEWATERING MACHINE					
驅動馬達	DRIVING MOTOR	HP	3	3	5
離心葉片數	CENTRIFUGAL VANE	pcs	66		
震動篩選台 VIBRATION SCREENER					
驅動馬達	DRIVING MOTOR	HP	1 / 4	1 / 3	1 / 3
集料系統 RESIN COLLECTING SYSTEM					
輸送風車	CONVEY BLOWER	HP	2	3	3
集料桶	RESIN COLLECTION TANK	kg	300		

ALL SPECIFICATION CAN BE ALTERED BY ORDER