
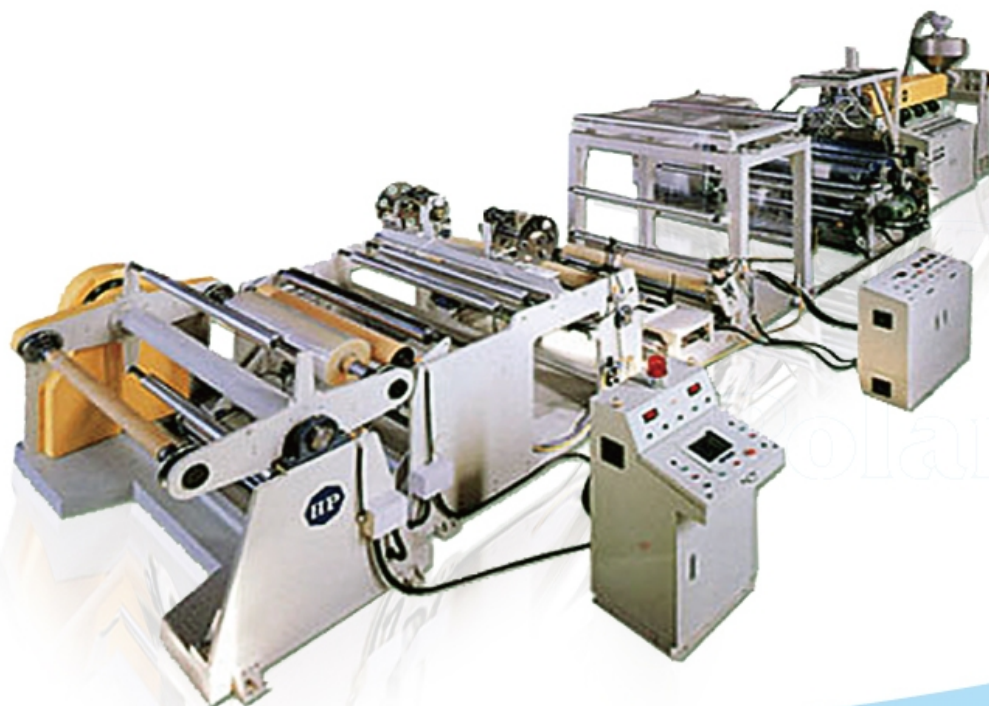


CPP Embossing Film Single-Screw Extruder

CPP 壓紋薄膜單螺桿膜押出機

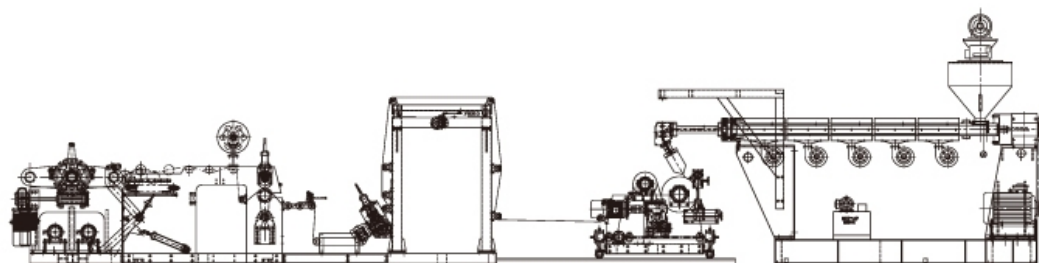

Specification

SPECIFICATION INFORMATION

適用原料	SUITABLE MATERIAL		CPP
耗電量	POWER CONSUMPTION	kw	160
押出產能 (PP)	EXTRUSION OUTPUT(PP)	kg / hr	150
機械占地面積	MACHINE OCCUPANCY AREA	M (L X W X H)	12 X 6 X 3
押出機 EXTRUDER			
螺桿直徑	SCREW DIAMETER	mm	Φ 100
螺桿長徑比	SCREW L / D RATIO	N / A	32 : 1
驅動馬達	DRIVING MOTOR	HP	60
溫度控制區	TEMPERATURE CONTROL	zone	5
模頭 T-DIE			
模頭寬度	T-DIE WIDTH	mm	1800
流道設計	PATH DESIGN	-	衣架歧管式 Hydrodynamic
成品寬度	PRODUCT WIDTH	mm	1500
成品厚度範圍	PRODUCT THICKNESS RANGE	mm	0.06 ~ 0.2
溫度控制區	TEMPERATURE CONTROL	zone	9
成型台 FORMATION			
成型輪寬度	FORMING ROLLER WIDTH	mm	1800
鏡面成型輪直徑	MIRROR ROLLER DIAMETER	mm	Φ 600
冷卻成型輪直徑	COOLING ROLLER DIAMETER	mm	Φ 300
驅動馬達	DRIVING MOTOR	HP	7.5 + 3
精密型風刀裝置	PRECISION AIR-KNIFE DEVICE	set	1
製膜真空風箱	FILM VACCUUM BOX	set	1
冷凍機	CHILLER	ton X set	20 X 1
機台昇降裝置	ELEVATING DEVICE	set	1
搖擺裝置 SWING UNIT			
搖擺馬達	SWING MOTOR	HP	1 / 8
中心線展開輪	CENTER EXPANDING ROLLER	pcs	5
輔助引取 TAKE-OFF UNIT			
引取鋼輪	STEEL ROLLER	pcs	1
引取膠輪	RUBBER ROLLER	pcs	1
驅動馬達	DRIVING MOTOR	HP	3
自動切片機 AUTO CUTTING MACHINE			
捲取直徑	WINDING DIAMETER	mm	Φ 300
捲取馬達	WINDING MOTOR	HP	3
換軸馬達	PIVOTING MOTOR	HP	2
氣壓軸	AIR SHAFT	pcs	2
自動切割裝置	AUTO-CUTTING DEVICE	set	1
張力控制器	TENSION CONTROLLER	set	1
進接裝置	ACCESSING UNIT	set	1
長度設定器	LENGTH SETTER	set	1

ALL SPECIFICATION CAN BE ALTERED BY ORDER