




EXTRUSION
ISO 9001-2000



PC/PMMA SHEET MAKING MACHINE >>>

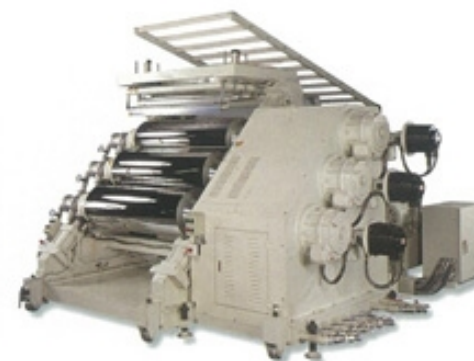


3 Roll Stack at
Inclined Configuration



Model: FK/SE-125-1300-PC

MACHINE LAYOUT

MODEL: FK/SE-125-1300-PC

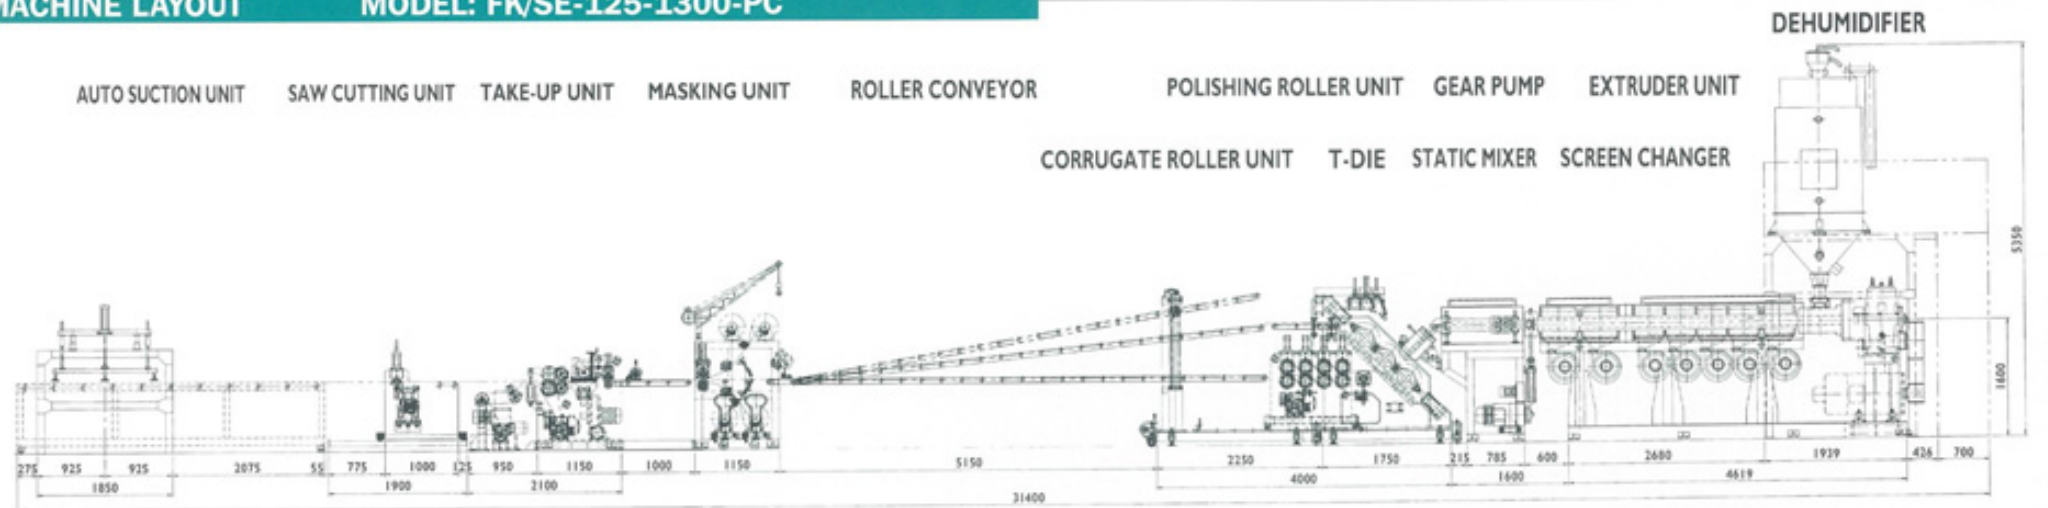

TECHNICAL DATA:

MODEL		FK/SE-125-1300-PC	FK/SE-150-2100-PC
Extruder			
Screw Diameter	mm	125	150
Screw L/D		35	35
Main drive	kw	150	225
Temp. control	zone	7 (PID+SCR)	8 (PID+SCR)
Output	kg/hr	220-300	500 (max.)
T-Die			
Lip width	mm	1200	2000
Product width	mm	(Plain) max.1000 (Corrugated) max.680	(Plain) max.1800 (Corrugated) max.1500
Product thickness	mm	(Plain) 1.0-6.0 (Corrugated) 0.8-2.9	(Plain) 1.0-6.0 (Corrugated) 0.8-2.9
Temp. control	zone	7	9
3 Roll Stack			
Roller width	mm	1300	2100
Roller diameter	mm	400	500
Drive motor	hp	5 / 5 / 5	7.5 / 10 / 7.5
Speed range	m/min	0.6 ~ 6.0	0.6 ~ 6.0
Heat / Cool Unit			
Media		water circulation	water circulation
Heating capacity	kw	30	40
Temp. control	zone	3	3
Pump	hp	10	15
Take-Off Unit			
Drive motor	hp	5	10
Line speed	m/min	0.6 ~ 6.0	0.6 ~ 6.0
Power Consumption			
Max.	kw	534	615
Average	kw	374	430

* All specifications, design and characteristics shown above are subject to change without prior notice.



An ISO 9001-2000 Company

鳳記國際機械股份有限公司

FONG KEE INTERNATIONAL MACHINERY CO., LTD.

HEAD OFFICE:

台南縣永康市正北一路168號

No. 168 Cheng Pei First Road,


Yuen-Kang City, Tainan, Taiwan.

TEL: +886-6-2532157~0, 2537211~4

FAX: +886-6-2533079, 2530277

<http://www.fki.com> Email: sales@fki.com

AGENT:

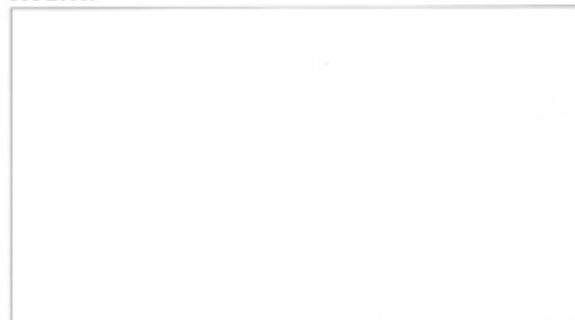

FKPC/PMMA-2-2007-06-1000E