


雙管平口式自動進料擴管機

Automatic double-pipes bellling machine

型號 Model No.	YH-48NI	YH-114NI	YH-216NI
管材外徑 Diameter	Φ22 - Φ48mm · 雙管式 (Twin pipes type)	Φ60 - Φ114mm · 雙管式 (Twin pipes type)	Φ140 - Φ216mm · 雙管式 (Twin pipes type)
擴管形式 Forming mode	內壓式 Internal pressure type	內壓式 Internal pressure type	內壓式 Internal pressure type
冷卻形式 Cooling mode	水冷式 Water cooled	水冷式 Water cooled	水冷式 Water cooled
加熱方式 Heating mode	陶瓷電熱爐 Ceramic electric heating	陶瓷電熱爐 Ceramic electric heating	陶瓷電熱爐 Ceramic electric heating
冷卻方式 Cooling mode	Water cooled	Water cooled	Water cooled
電控系統 Electronic Control System	PLC	PLC	PLC

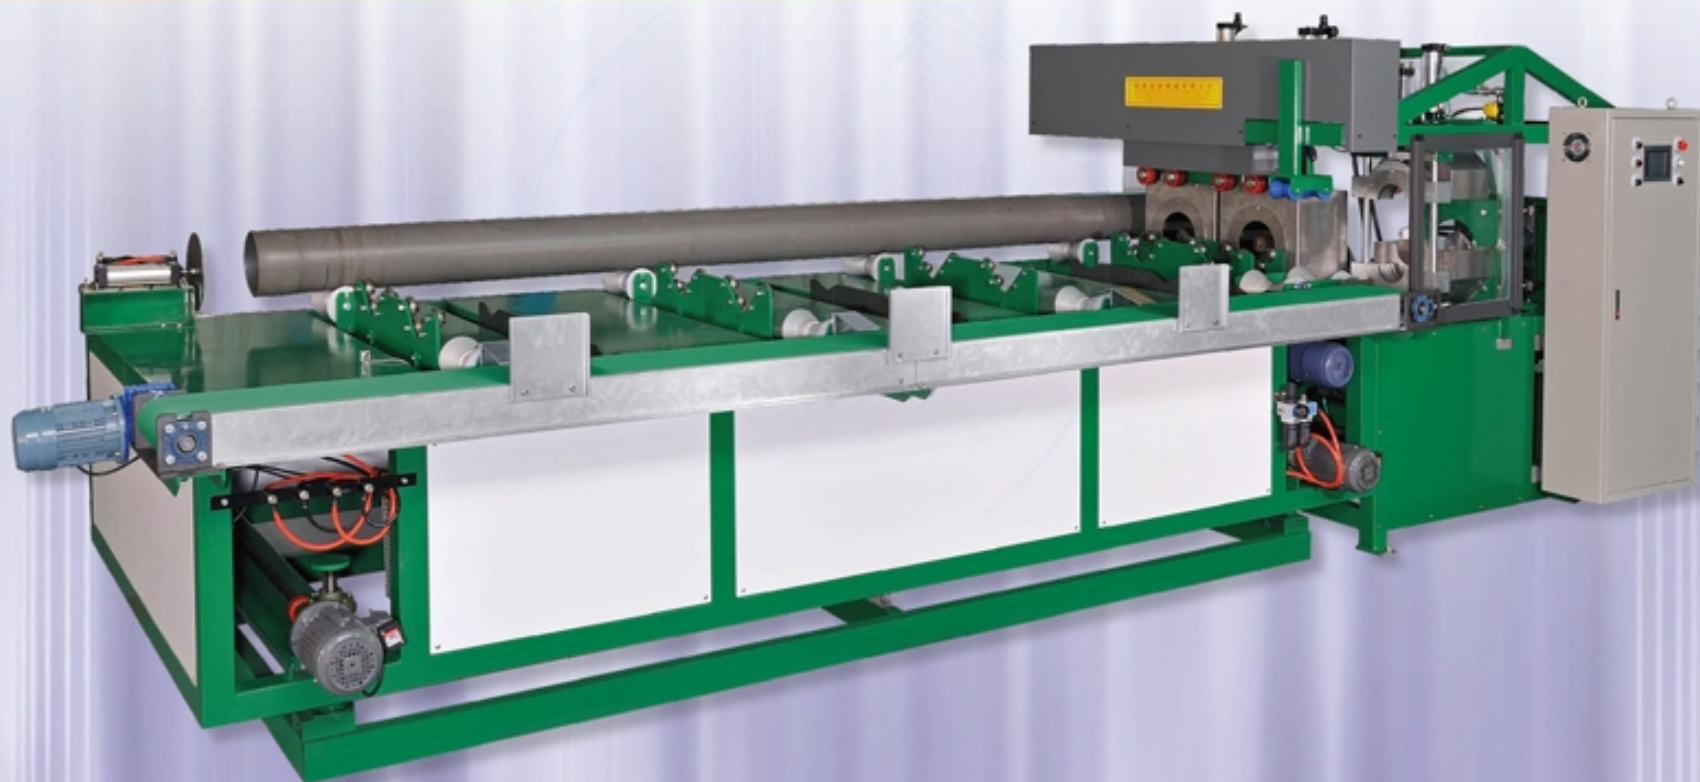

紗線包覆機&異型押出兩用機

Yarn coating and profile Extrusion dual-purpose machine

型號 Model No.	YH-50 & YH-30
螺桿螺套直徑L/D Screw diameter Screw length L/D	Φ50mm & Φ 30mm
押出機驅動馬達 Driving motor of extruder	10HP & 5HP
押出量 Extruding capacity	30KG/HR & 6.8KG/HP
冷卻水槽 Size of stainless steel cooling Tank	1.水槽材質：SUS304不銹鋼板 Material : SUS304 Stainless steel Sheet 2.水槽長度：3000mm Length : 3000mm
雙輪式引取機-驅動馬達 Haul off Unit(Twin wheels): Driving motor	1HP AC馬達+變頻器+減速機 1HP AC Motor+ Converter + Reducer
氣壓式切斷機 Pneumatic Cutting Machine	滑軌式軌道 & 氣壓式切刀座 Slide Rail & Pneumatic Cutter
雙輪捲收機-驅動馬達 Twin wheel winder: driving motor	1HP 轉距馬達&減速機 1HP Torque motor & Reducer



汽車地毯貼合機


TPR Adhering Machine Of Car Mat

應用: 適用於汽車腳踏板背膠製造與貼合

Application: Suitable for car mat back sheet manufacturing and bonding

高抗張及低壓縮變型、低加工成本、易加工/免加硫、橡膠觸感佳、機械性能良好、
百分之百回收、耐低溫特性、耐藥品性、延伸性佳、耐候性佳

High tensile and low compression, low processing costs, easy processing / free sulfur, good rubber touch, good mechanical properties, 100% recovery, low temperature resistance, chemical resistance, good elongation, good weather resistance

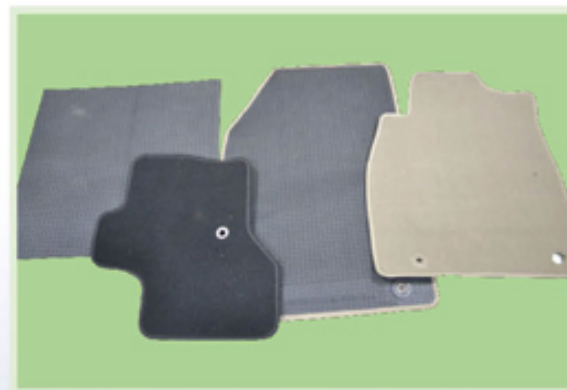

自動管材捆包機

Automatic strapping machine for pipe

型號 Model No.	YH-34PK
管材外徑 Diameter	Φ22 - Φ34mm
捆包形式 Strapping mode	裹膜式Stretch wrapping type
動力輸送帶 Powered Conveyor	尺寸 Size: 5M * 0.4M * 0.81M (L * W * H)
電控系統 Electronic Control System	PLC
生產速度 Production speed	30 捆/小時 30 bundle/hr

