



CO-EXTRUSION PP / PE LAMINATION MACHINE FOR FLEXIBLE PACKAGING FILM

FK/LAFM-75/75-1400




Extrusion Excellence

www.fki.com

FK/LAFM-75/75-1400

CO-EXTRUSION PP / PE LAMINATION MACHINE FOR FLEXIBLE PACKAGING FILM

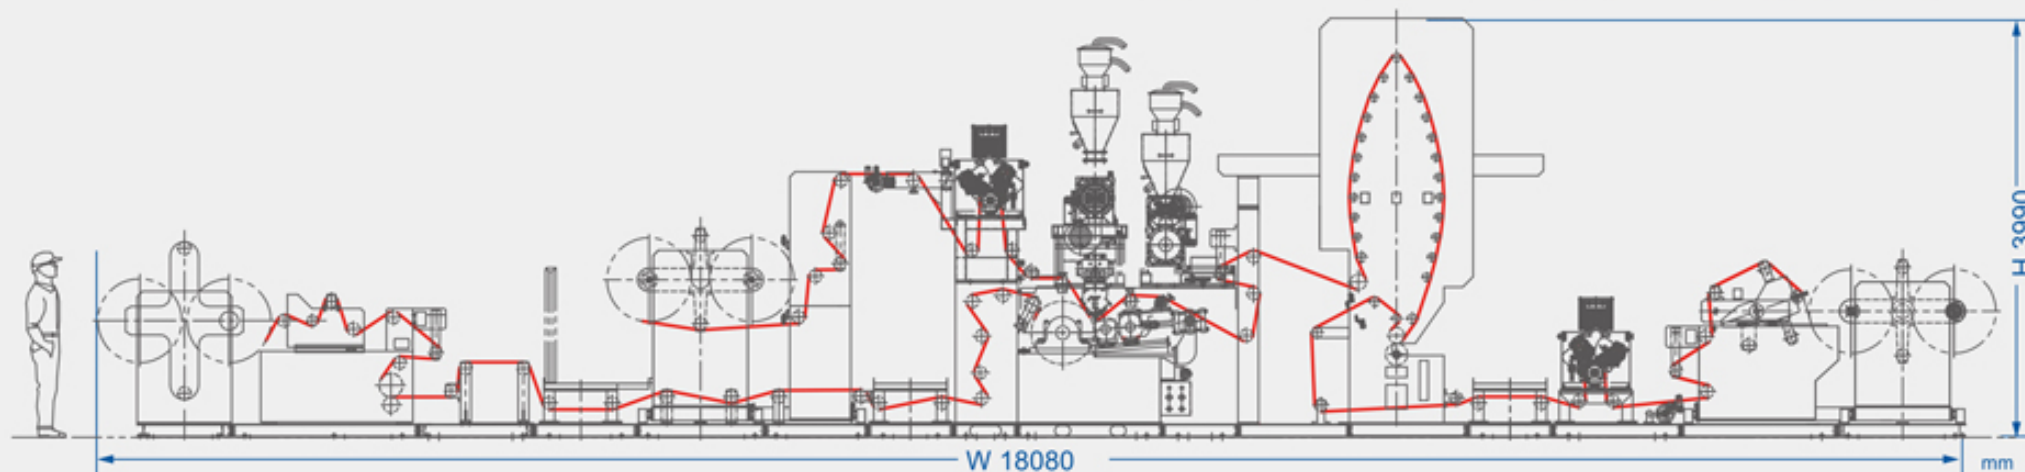

Extruder A/B : 75mm / 75mm, 75HP / 75HP, L/D 32:1	Max. Extrusion Capacity : 150 / 150 kg/hr
3 Layer Feedblock : ABA / BBA / ABB, EDI Brand	Manual T-Die, EDI Brand
Main Unwinder : 1000mmΦ, Top & Bottom Cutter	Drive Motor : 10HP x 2, 3" + 6" Air Shaft
Primer Coating & Drying Unit : Arch Type, Drying Length 3.6m, Heating Capacioy 96KW	
Lamination Unit : 600mmΦ Chill Roller, FKI Made	Drive Motor : 15HP
Sandwich Unwinder : 800mmΦ, Top & Bottom Cutter	Drive Motor : 7.5HP x 2, 3" + 6" Air Shaft
Rewinder : 1000mmΦ, Top & Bottom Cutter	Drive Motor : 10HP x 2, 6" Air Shaft
Drive & Plc : SIEMENS, Germany	17" HMI SIEMENS, Germany
AVG. Power Consumption : 173KW / 240A	Machine Size: 19 X 11 X 4m (L X W X H)

We reserve the right to make technical changes without prior announcement. All rights reserved. ©2018 FONG KEE INTERNATIONAL MACHINERY CO., LTD.

Designed by Pakaria 2018-07-+886-6-24517079



FONG KEE INTERNATIONAL MACHINERY CO., LTD.

No. 168, Cheng Pei First Rd., Yongkang Dist., Tainan City 71042, Taiwan

Tel. +886-6-2532157 Fax. +886-6-2533079 Email. sales@fki.com



www.fki.com uCloud