


Turnkey solution for plastic recycling machines

整廠規畫、塑膠造粒的專家

GEORDING

www.geording.com

側邊入料 **SIDE ENTRANCE**

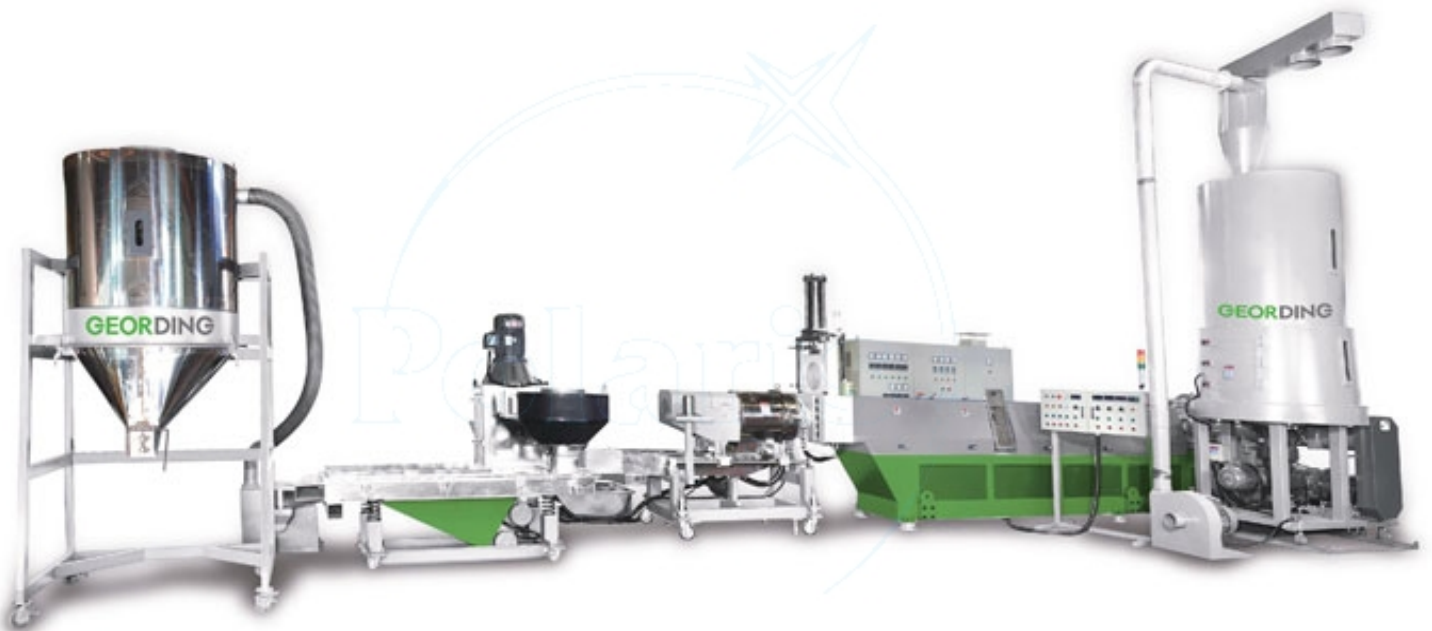

側邊入料子母機模頭切

Side entrance two stages die-face pelletizing machine

側邊入料子母機拉條

Side entrance two stages spaghetti pelletizing machine

側邊入料單機臥式水環切

Side entrance one stage horizontal die-face pelletizing machine




- Spaghetti cutting is suitable for high melting index plastic.
- 拉條切適合MI高的塑膠。



SIDE ENTRANCE 側邊入料

- After crusher smashes material, traditional way is to build a storage room or to purchase a storage mixer to keep light and space-occupying film. Side entrance feeding replaces this function to store film material. Combines storage and force feeding function.
- Feeding capacity is more stable than traditional force feeding. Able to open a input hole on top of barrel (feeding formula and master batch pellet). It's a useful and high production type.
- 一般粉碎機粉碎完原料，傳統方式多是建一個儲料室或買一個拌料桶來裝一些又輕又占空間的薄膜料。側邊入料取代了這些功能儲存薄膜，並同時具有儲料及強壓入料的功能。
- 入料的產能比一般傳統強壓入料還穩定，可以在料管上方加開入料孔同時餵料或配料。加進配方或色母料，是比較實用且中高產能的機種。

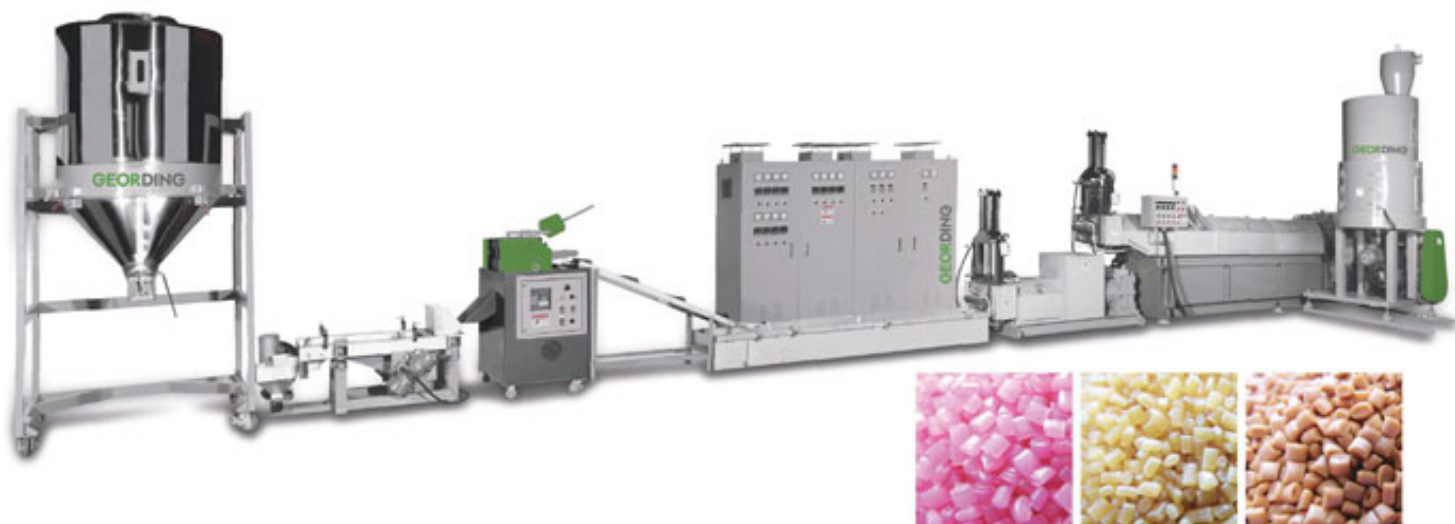

Side Entrance Two Stages Spaghetti Pelletizing Machine 側邊入料子母機拉條

Model 機型	GD-85SE-2SP	GD-100SE-2SP	GD-120SE-2SP	GD-150SE-2SP	GD-175SE-2SP
Main Extruder 押出主機					
Screw L/D 螺旋軸長徑比	32	36	36	36	36
Main Power 主機動力	40HP~60HP	50~100HP	100~150HP	150~200HP	200~300HP
Temp. Control 溫度控制	5 zones	7 zones	8 zones	9 zones	10 zones
Heating Capacity 電熱容量	36KW	42KW	75KW	90KW	125KW
Side Entrance Power 側入料馬力	5HP	10HP	10HP	15HP	15HP
Storage Barrel Capacity 儲存桶容量	1500L	2500L	2500L	2500L	2500L
Storage Barrel Power 儲存桶動力	5HP	5HP	5HP	7.5HP	10HP
Capacity 工作量	120~180KG	200~300KG	300~400KG	400~650KG	600~800KG
Sub-extruder 押出子機					
Screw L/D 螺旋軸長徑比	8	8	8	8	8
Power 動力	15HP	30HP	40HP	50HP	60HP
Temp. Control 溫度控制	3 zones	4 zones	4 zones	5 zones	6 zones
Heating Capacity 電熱容量	19KW	22KW	25KW	38KW	58KW
Cooling Tunnel 冷卻槽	3050x280x250	3050x280x250	3050x280x250	5000x500x280	5000x500x280
Pellet Cutter 切粒機					
Power 動力	3HP	5HP	7.5HP	10HP	10HP
Blower 輸送風車					
Power 動力	3HP	5HP	5HP	7.5HP	10HP
Silo 成品儲料桶					
Capacity 容量	1000 L	1000 L	1000 L	1000 L	1000 L



Side Entrance One Stage Die-Face Pelletizing Machine

側邊入料單機模頭切

Model 機型	GD-85SE-DF	GD-100SE-DF	GD-120SE-DF	GD-150SE-DF	GD-175SE-DF
Main Extruder 押出主機					
Screw L/D 螺旋軸長徑比	32	36	36	36	36
Main Power 主機動力	40HP~60HP	50~100HP	100~150HP	150~200HP	200~300HP
Temp. Control 溫度控制	5 zones	7 zones	8 zones	9 zones	10 zones
Heating Capacity 電熱容量	35KW	50KW	70KW	85KW	150KW
Side Entrance Power 側入料馬力	5HP	10HP	10HP	15HP	15HP
Storage Barrel Capacity 儲存桶容量	1500L	2500L	2500L	2500L	2500L
Storage Barrel Power 儲存桶動力	5HP	5HP	5HP	7.5HP	7.5HP
Hydraulic Power 模頭油壓動力	3 HP	5 HP	5 HP	7.5 HP	7.5 HP
Capacity 工作量	120~180KG	250~400KG	300~450KG	450~600KG	700~1000KG
Die Face Cutter Power 模頭切馬力					
Power 動力	2HP	3HP	3HP	5HP	7.5HP
Water-Cooling Pump 水冷卻幫浦					
Power 動力	3HP	3HP	3HP	5HP	5HP
Centrifugal 脫水機					
Power 動力	10HP	10HP	10HP	15HP	20HP
Vibrating Screener 震動槽					
Power 動力	1/4HPx2	1/4HPx2	1/4HPx2	1/4HPx2	3/4HPx2
Blower 輸送風車					
Power 動力	3HP	5HP	5HP	7.5HP	10HP
Silo 成品儲料桶					
Capacity 容量	1000 L	1000 L	1000 L	1000 L	1000 L





Side Entrance Two Stages Die-Face Pelletizing Machine

側邊入料子母機模頭切

Model 機型	GD-85SE-2DF	GD-100SE-2DF	GD-120SE-2DF	GD-150SE-2DF	GD-175SE-2DF
Main Extruder 押出主機					
Screw L/D 螺旋軸長徑比	32	36	36	36	36
Main Power 主機動力	40HP~60HP	50~100HP	100~150HP	150~200HP	250~300HP
Temp. Control 溫度控制	5 zones	7 zones	8 zones	9 zones	10 zones
Heating Capacity 電熱容量	35KW	50KW	75KW	80KW	150KW
Side Entrance Power 側入料馬力	5HP	10HP	10HP	15HP	15HP
Storage Barrel Capacity 儲存桶容量	1500L	2500L	2500L	2500L	2500L
Storage Barrel Power 儲存桶動力	5HP	5HP	5HP	7.5HP	7.5HP
Hydraulic Power 油壓動力	3HP	5HP	5HP	7.5HP	7.5HP
Capacity 工作量	120~180KG	250~400KG	300~450KG	450~600KG	700~1000KG
Sub-extruder 押出子機					
Screw L/D 螺旋軸長徑比	8	8	8	8	8
Power 動力	15HP	30HP	40HP	50HP	60HP
Temp. Control 溫度控制	3 zones	4 zones	5 zones	6 zones	6 zones
Heating Capacity 電熱容量	22KW	25KW	38KW	40KW	58KW
Die Face Cutter Power 模頭切馬力					
Power 動力	2HP	3HP	3HP	5HP	7.5HP
Water-Cooling Pump 水冷卻幫浦					
Power 動力	3HP	3HP	3HP	5HP	5HP
Centrifugal 脫水機					
Power 動力	10HP	10HP	10HP	15HP	20HP
Vibration Screener 震動槽					
Power 動力	1/4HPx2	1/4HPx2	1/4HPx2	1/4HPx2	3/4HPx2
Blower 輸送風車					
Power 動力	3HP	5HP	5HP	7.5HP	10HP
Silo 成品儲料桶					
Capacity 容量	1000 L	1000 L	1000 L	1000 L	1000 L

GEORDING

久鼎機械股份有限公司
GEOR-DING MACHINERY CO., LTD.

437 台中市大甲區幼獅工業區青年路137號
No.137, Qingnian Rd.,
Dajia Dist., Taichung City 437, Taiwan
Tel. 886-4-2682-1888 Fax. 886-4-2681-9777
www.geording.com
E-Mail: sales@geording.com

