



PS/PE FOAM SHEET EXTRUSION LINE



Features

- Various models to meet with your needs.
- Output: From 200 kg/hr to 720 kg/hr for EPS
- Output: From 120 kg/hr to 500 kg/hr for EPE



Foam Extruder



Take-Off Unit



Winding Unit



Gear Pump &
Non-Stop Screen Changer





Lewa Butane Pump



Air Cooling Ring & Forming Mandrel


PS/PE FOAM SHEET EXTRUSION LINE

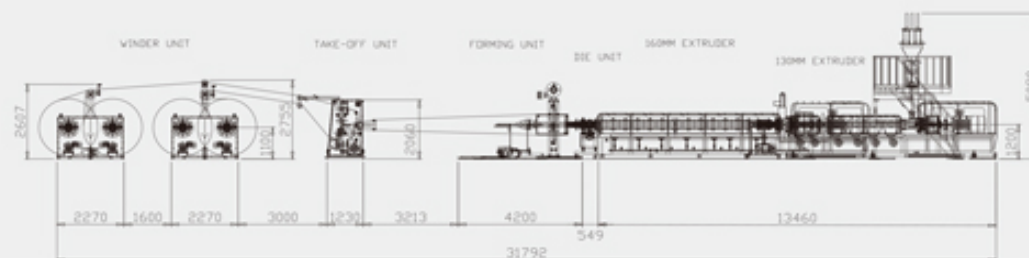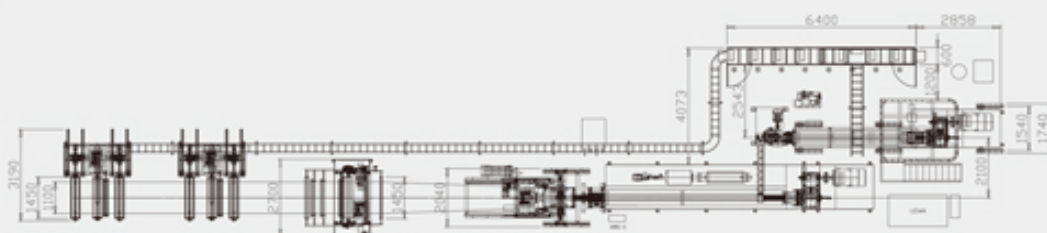

Application

- Food Tray / Packaging Material



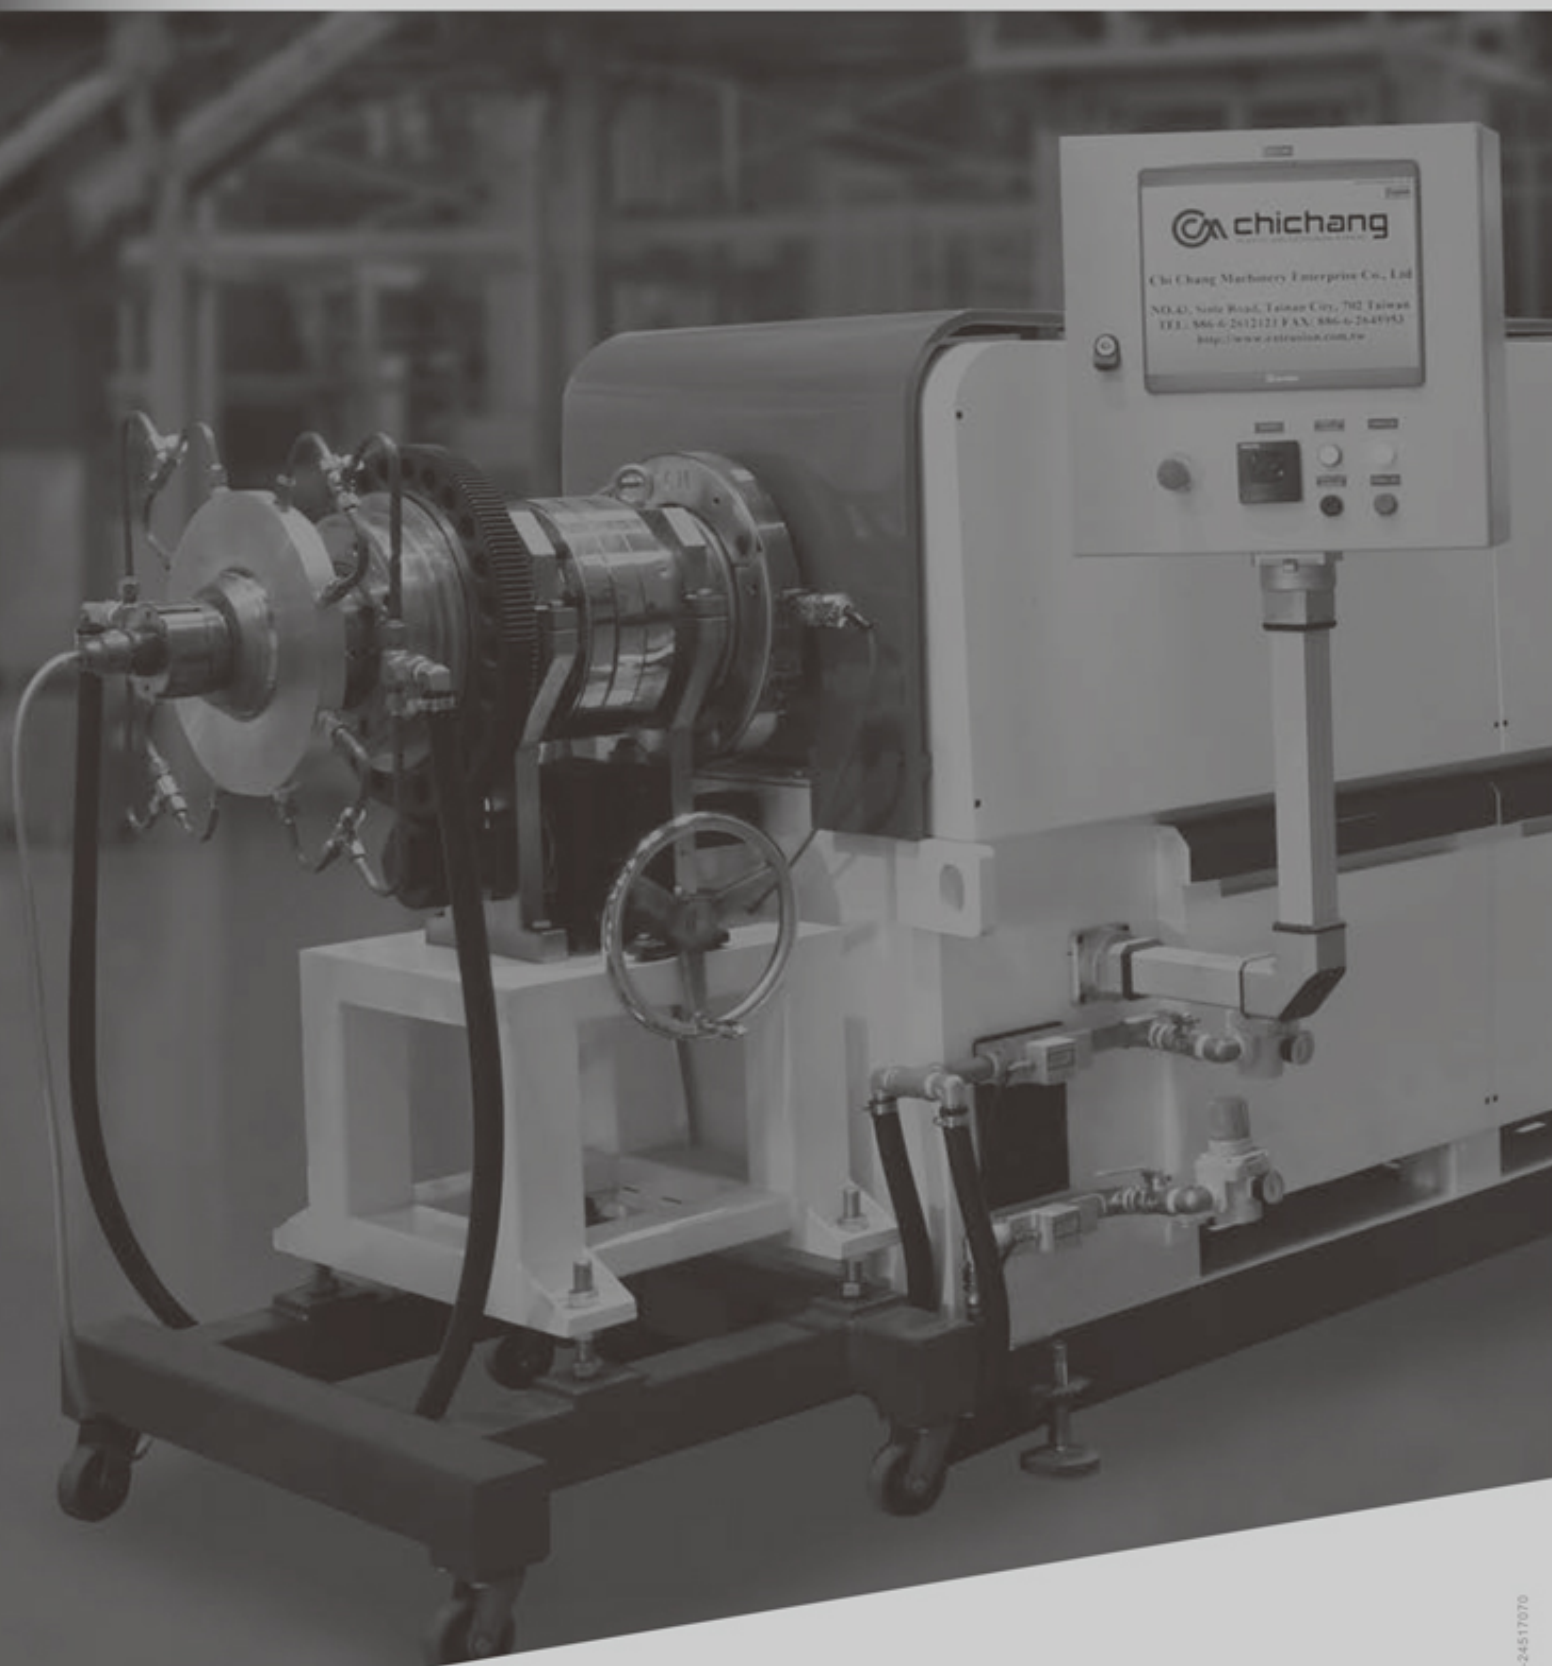

CHI CHANG MACHINERY ENTERPRISE CO., LTD.

No. 43, Sinle Road, Tainan City 702, Taiwan
Tel: +886-6-261-2121 Fax: +886-6-264-5953
E-mail: chichang2018@extrusion.com.tw

