

YICHEEN

S2 Series




DEVELOP AND REFORM NEW PATTERN AND MODEL IN HOPE
OF FURNISHING CUSTOMER WITH THE MOST SOPHISTICATED,
EFFECTIVE AND FACILITATIVE MACHINERY.

www.yicheen.com.tw

HIGH SPEED SLITTING MACHINE

高速分條機

S2A Series

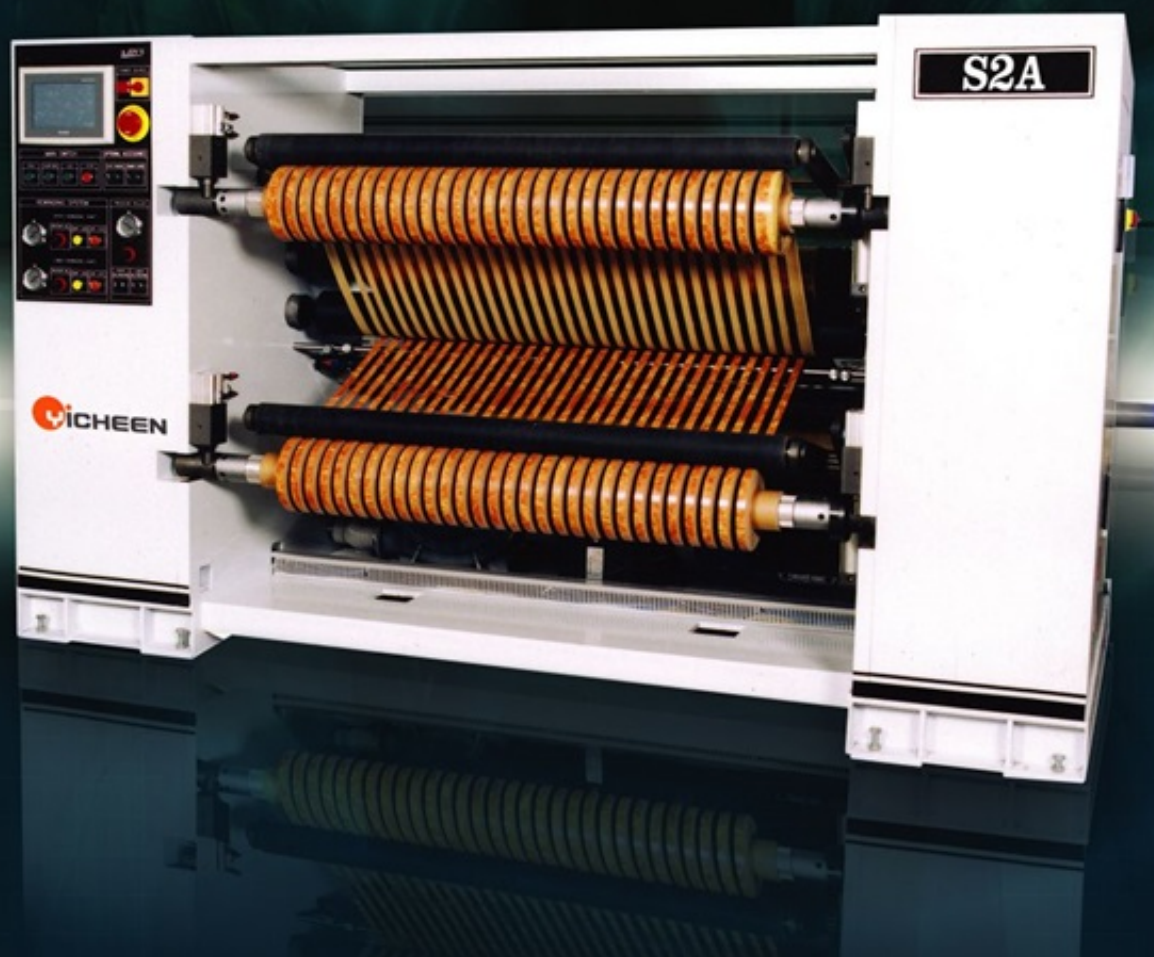

S2A 高速分條機**HIGH SPEED SLITTING MACHINE****適用範圍：**

OPP、BOPP、PET、PVC、轉印紙、銅箔、不織布...等各式薄膜

產品介紹：

● 高速卷取，速度可達1M~300M/分 ● 雙收料軸捲取 ● 旋臂式放/收料氣壓軸 ● 放料配備全自動微偏位張力控制器，數值顯示張力值，提供穩定及精準的張力控制 ● 配備EPC/LPC自動對邊裝置，維持分條位置精確 ● 配備平刀及圓刀雙用，可依不同材質使用 ● 收料部份配備超音波直徑檢出器 ● 配備氣壓式收料壓輪，可用來消除於收捲時包藏進入(FILM)薄膜內之空氣，以避免造成原材料滑動，導致成品不良 ● 全數位化電腦控制系統，配備PLC及觸控螢幕具故障顯示警告功能

選購配備：

● 無軸心放料(電動左右移動) ● 同步收邊機 ● 靜電消除裝置 ● 差速捲取裝置

Range of application：

OPP、BOPP、PET、PVC、transfer paper、foil、Non-woven cloth...etc.

Description:

● High speed rewind, machine speed is 1~300M/min ● Duplex rewinder ● Swing out unwind and rewind air shaft ● Equipped with automatic tension controller and load cell, tension value digitally display, increase tension control precision and stable ● Equipped with EPC/LPC position control to ensure accurate slitting position ● Equipped with razor cutter and circular shear cutter ● Rewind section equip with diameter-detector to control rewind motor speed ● Equipped with pneumatic press roller on re-winder to eliminate the air go into rewind film and avoid film slip ● Full digitally computer control system, equipped with PLC and touch panel system, error message alarm and indication are displayed on the screen

Optional equipment:

- Shaftless unwind stand (electrical left/right moving)
- Trim rewinder with speed synchronizing
- Static eliminating device
- Different center rewinding device (for shrinkable film)

**規格明細****SPECIFICATION & DETAIL****S2A 高速分條機 HIGH SPEED SLITTING MACHINE**

型號 Model No.	S2A
原材料寬度 Parent web width	1000~1800 mm
原材料直徑 Parent web diameter	500~1000 mm (shaft-less unwind stand)
材料厚度 Material thickness	12~150 μ
收料卷直徑 Rewind web	$\varnothing$ 500 mm
最小分條寬度 Min. Slit width	50 mm
機械速度 Machine speed	Max. 300M/min (for 60Hz)
電壓 Machine power	200/220V - 3Ph - 50/60Hz (或依客戶需求As required)
耗電量 Power consumption	20Kw
空壓需求 Compressed air required	5~6 kgf - 230L/min

- 本公司保有於適當時機修改以上規格的權利

Specifications are subject to change without notice for design improvement.

**VERTICAL
SLITTING MACHINE**

立式手動分條機

S2M-V Series



S2M-V 立式手動分條機

VERTICAL SLITTING MACHINE

適用範圍

塑膠、塑膠膜類、紙類...等

產品介紹

● 卷取速度可達1M~200M/分 ● 雙收料軸捲取(葉片式) ● 放料配備手動微偏位張力控制器，數值/指針顯示張力值，提供穩定及精準的張力控制 ● 配備EPC自動對邊裝置，維持分條位置精確。
● 配備平刀及圓刀(擇一)，可依不同材質使用 ● 收料部份計米到達停機 ● 配備氣壓式收料壓輪，可用來消除於收捲時包藏進入(FILM)薄膜內之空氣，以避免造成原材料滑動，導致成品不良 ● 採微電腦控制系統，操作簡單快速準確，易於保養容易

選購配備

● 無軸心放料(電動左右移動) ● 同步收邊機 ● 靜電消除裝置 ● 差速捲取裝置

Range of application:

Plastic、Plastic film、Paper...etc.

Description:

● Rewind speed 1M~200M/minute ● Duplex rewinder (Leaf type) ● Equipped with manual micro location offset tension controller, tension value digitally display, increase tension control precision and stable ● Equipped with EPC position control to ensure accurate slitting position ● Equipped with flat razor or circular shear cutter in accordance with material character ● Rewind section equipped with meter reached auto stop function ● Equipped with pneumatic press roller on re-winder to eliminate the air go into rewind film and avoid film slip ● Microcomputer controller for maximum operation convenience and accuracy

Optional equipment:

- Shaftless unwind stand (electrical left/right moving)
- Trim rewinder with speed synchronizing
- Static eliminating device
- Different center rewinding device (for shrinkable film)


**規格明細**

SPECIFICATION & DETAIL

S2M-V 立式手動分條機 VERTICAL SLITTING MACHINE

型號 Model No.	S2M-V
原材料寬度 Parent web width	1000~1600 mm
原材料直徑 Parent web diameter	500~800 mm
材料厚度 Material thickness	12~150 μ
收料卷直徑 Rewind web	Ø 400 mm
最小分條寬度 Min. Slit width	25 mm
機械速度 Machine speed	Max. 200M/min (for 50/60Hz)
電壓 Machine power	380V - 3Ph - 50/60Hz (或依客戶需求As required)
耗電量 Power consumption	4.0Kw
空壓需求 Compressed air required	5~6 kgf - 230L/min

- 本公司保有於適當時機修改以上規格的權利
Specifications are subject to change without notice for design improvement.

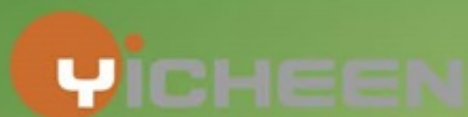

鎰群科技股份有限公司
YICHEEN TECHNOLOGY CO., LTD.

709台南市安南區安通路二段60號

No. 60, Sec. 2, Antong Rd., Annan Dist., Tainan City 709, Taiwan

Tel: +886-6-356-2788 Fax: +886-6-356-2777

E-mail: sales@yicheen.com.tw

2008年8月 EC系列通過CE認證

2010年5月 通過ISO9001:2008認證

2011年8月 ED系列通過CE認證

Aug 2008 EC series – CE certification

May 2010 ISO9001:2008

Aug 2011 ED series – CE certification



QC017
ISO9001:2008

QMS 010