



CO-EXTRUSION LAMINATION MACHINE FOR FLEXIBLE PACKAGING FILM

FK/LAFM-65/100-1400



Extrusion Excellence

www.fki.com

FK/LAFM-65/100-1400

CO-EXTRUSION LAMINATION MACHINE FOR FLEXIBLE PACKAGING FILM




Design Line Speed

400 MPM



Max. Running Speed

350 MPM




Roller width

1400 mm



Lamination Thickness

0.01~0.04 mm

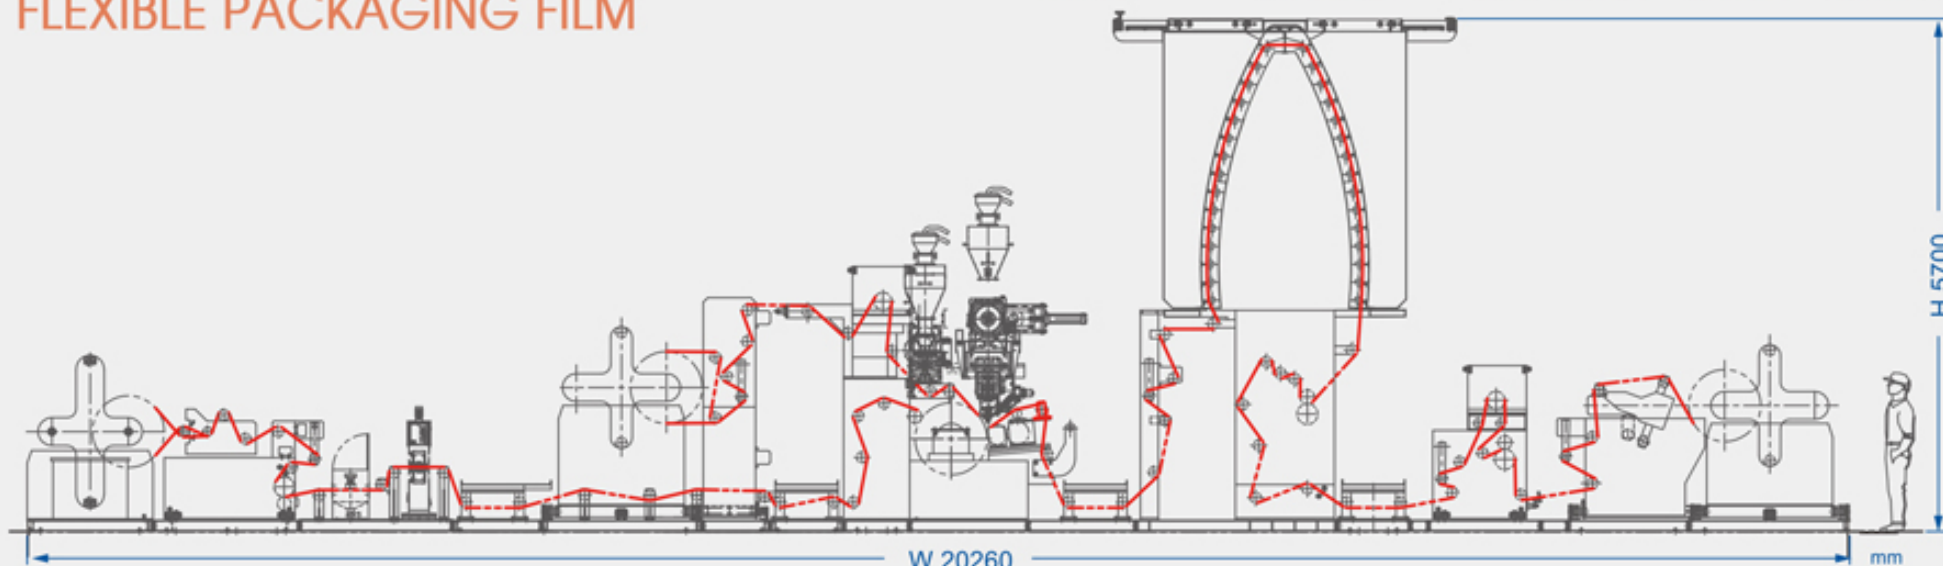

Extruder A / B : 65mm / 100mm, 60HP / 100HP, L/D 32:1

3 Layer Feedblock : ABA / BBA, Cloeren Brand

Main Unwinder : 800mmΦ, Top & Bottom Cutter, 6" Air Shaft

Primer Coating & Drying Unit : Arch Type , Drying Length 6.4M, Heating Capacity : 240KW

Lamination Unit : 800mmΦ Chill Roller FKI Made

Sandwich Unwinder : 800mmΦ, Top & Bottom Cutter

Rewinder : 800mmΦ, Top & Bottom Cutter

Drive + PLC Control : ALLEN BRADLEY, USA

AVG. Power Consumption: 276KW / 384 A/hr

Extrusion Capacity : 120 / 320 kg/hr

Auto T-Die, Cloeren Brand

Drive Motor : 15HP Constant HP Motor x 2

Drive Motor : 20HP

Drive Motor : 15HP Constant HP Motor x 2, 3" + 6" Air Shaft

Drive Motor : 15HP Constant HP Motor x 2, 6" Air Shaft

17" Industrial PC, ADVANTECH, Taiwan

Machine Size : 22 x 13 x 6M (L x W x H)

We reserve the right to make technical changes without prior announcement. All rights reserved. ©2018 FONG KEE INTERNATIONAL MACHINERY CO., LTD.

Designed by Polaris 2018-07-+886-4-24517079



FONG KEE INTERNATIONAL MACHINERY CO., LTD.

No. 168, Cheng Pei First Rd., Yongkang Dist., Tainan City 71042, Taiwan

Tel. +886-6-2532157

Fax. +886-6-2533079

Email. sales@fki.com

www.fki.com

uCloud

