

3 LAYER HIGH PERFORMANCE BLOWN FILM EXTRUSION LINE


Polaris



RH-TT Series



Flowchart

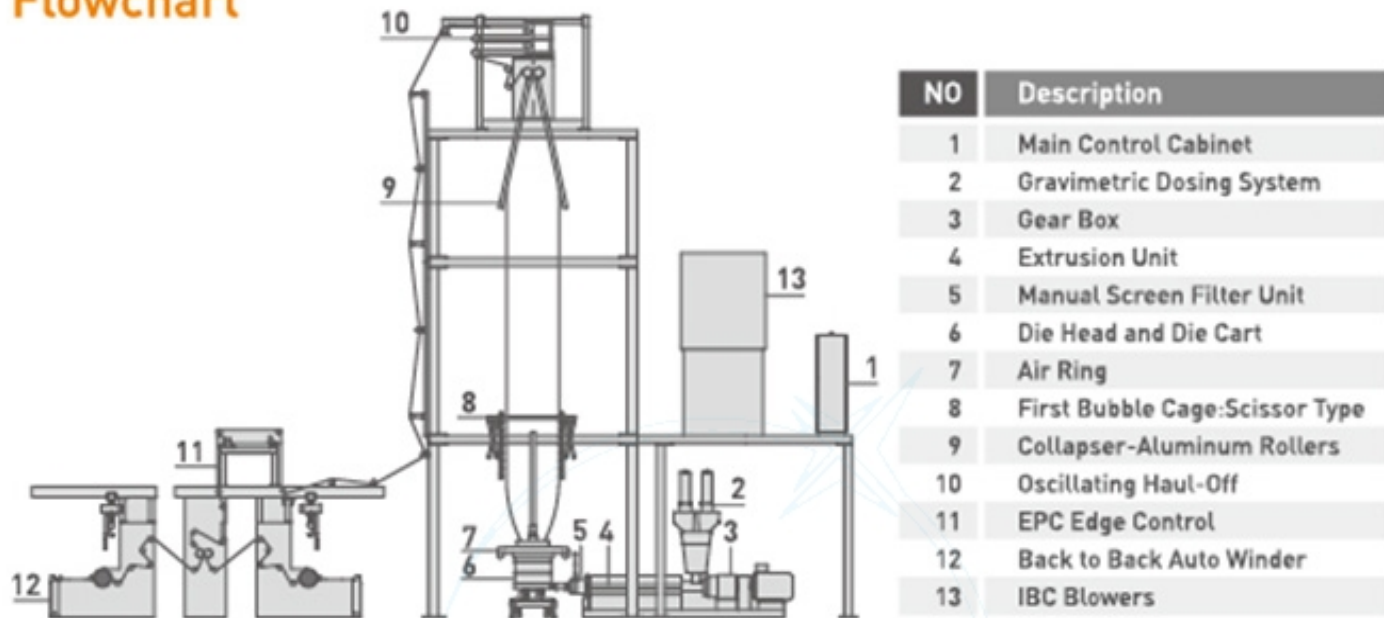

Features

- Application: Stretch Hood, Food Packaging Film, Agricultural Film, Industrial Packing Film, Collation Shrinkable Film, Stretch Film and Cling Film, etc.
 - RH series is supplied with high performance AC main motor & inverter, which is designed for energy saving as well as minimum maintenance.
 - Minimum power consumption and labor cost.
 - Improved Die & Air Ring design ensures higher film quality and easier production control.
 - Top oscillating haul-off and back to back double winder.
 - Equipped with PID temperature controller and user friendly HMI control system.
- Option: Gravimetric Dosing System, Thickness Gauge Control, Auto Air Ring Control, Inner Bubble Cooling System, Chiller, Chilling Box.

Specifications

MODEL	RH45/55/45TT	RH55/65/55TT	RH55/75/55TT	RH65/90/65TT
Suitable Materials	LDPE / LLDPE / MDPE / HDPE / PP / mLLDPE / Recycled Materials			
Max. Film Width (mm)	1200	1600	1800	2400
Thickness of Film (mm)	0.02~0.2			
Max. Extrusion Output (kg/hr)	200	300	400	500
Machine Height (M)	8	10	12	13

*Final specifications of machine depend on the film application, material to be used, accepted thickness tolerance and your special requirements.

www.lungmeng.com.tw



uCloud



LUNG MENG MACHINERY CO., LTD.

Headquarters

No. 20, Huan Kung Rd.,
Yung Kang Ind. Area,
Tainan City 710, Taiwan
T. +886-6-292-1124
F. +886-6-203-1178
E. sales@lm-hq.com

Taipei Office

4F-7, No. 28, Sec. 3,
Ren-ai Rd., Da-an Dist.,
Taipei City 104, Taiwan
T. +886-2-2704-0758
F. +886-2-2704-0458