

AUTOMATIC ELECTRONIC HIGH SPEED HEAT CUTTING & SEALING MACHINE FOR VEST TYPE BAGS. (AUTO ATTACHED)

電子控制自動化高速熱切背心袋專用機 (訂本裝置)





專利號碼

PATENT NO: 073860
104891

MODEL: CWAAH



MODEL: CWAH

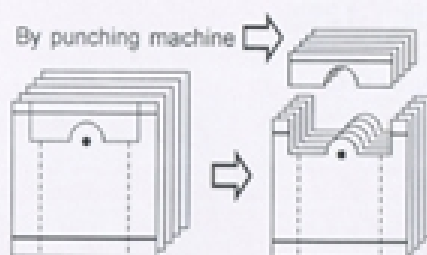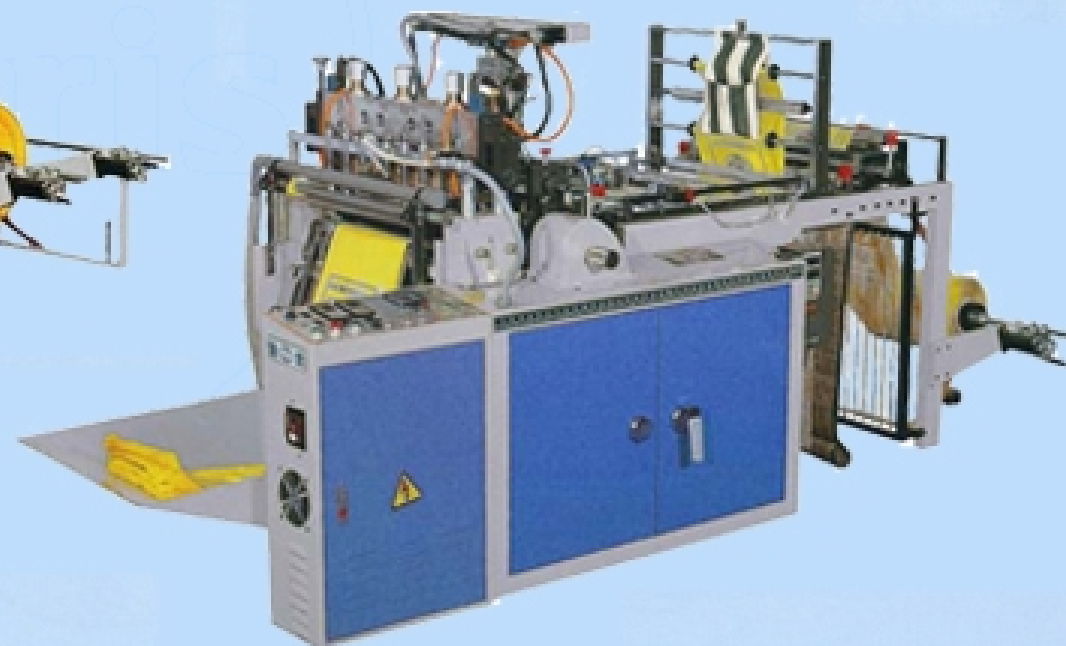

CHAO WEI PLASTIC MACHINERY CO., LTD.

SPECIFICATIONS: 規 格

型 式	MODEL	CWAAH 800 32"	CWAH 800 32"	CWAAH 700 28"	CWAH 700 28"	CWAH 500 20"
封 袋 寬	Bag Width	330+330%	350+350%	280+280%	300+300%	450%
		13"+13"	14"+14"	11"+11"	12"+12"	18"
封 袋 長	Bag Length	200—750	200—750	200—750	200—750	200—750
		8"—30"	8"—30"	8"—30"	8"—30"	8"—30"
封切厚度	Converting Thickness	0.012—0.040 %	0.012—0.040 %	0.012—0.040 %	0.012—0.040 %	0.012—0.040 %
長度誤差	Accuracy Length	±1mm	±1mm	±1mm	±1mm	±1mm
封切速度	P.C.S./MIN	30—120	30—120	30—120	30—120	30—120
動 力	Motor/HP	2	2	1	1	1
電 熱 量	Heater	3.4kw	3.4kw	3.4kw	3.4kw	3.4kw
全 台 備 電	Power Required	5.2kw	5.2kw	4.3kw	4.3kw	4.3kw
機 械 尺 寸	Dimension: LxWxH(cm)	303x160x130	303x137x130	303x150x130	303x127x130	303x107x130
機 械 重	Machine Weight	900kgs	900kgs	800kgs	800kgs	700kgs
裝 箱 尺 寸	Packing: LxWxH(cm)	315x172x152	315x149x152	315x162x152	315x139x152	315x119x152
裝 機 重	Gross Weight	1200kgs	1200kgs	1100kgs	1100kgs	1000kgs
特 點	Features	two photo cell 2 lines	one photo cell 2 lines	two photo cell 2 lines	one photo cell 2 lines	one photo cell 1 line

註：CWAH 為雙軌電眼雙條生產印刷袋。
CWAH 為單軌電眼雙條生產一條印刷袋，一條非印刷袋。



ISO-9001 FM40584

僑偉塑膠機械有限公司

CHAO WEI PLASTIC MACHINERY CO., LTD.

公 司：嘉義縣水上鄉大堀村大堀尾1-12號

NO. 1-12, TA CHUEH WEI, TA CHUEH TSUN, SUEI

SANG HSIANG, CHIA YI HSIEN, TAIWAN, R.O.C.

TEL: (05)2686688 . 2686677

FAX: 886-5-2682288 . 2687821

E-mail: chao.wei@msa.hinet.net

E-mail: chaowei7@ms38.hinet.net

http://www.chaowei.com.tw

Free Machinery CD-Roms are available upon request

CWAAH

FEATURES:

1. This machine operates simultaneously in 2 different sizes with 2 photo cells for printing bags.
2. Automatic electronic control. Use plugging type IC circuit for easy replacing.
3. Electromagnetic clutch and brake keep bags cutting and sealing accurately.
4. The machine will stop automatically, when 1.)the bags become superimposed or overlapped.
2.)the print is in inaccurate position.

特 點：

1. 本機為雙軌電眼，可一次生產2條不同尺寸印刷袋。
2. 電子控制全自動化生產，IC電子迴路採用插座式換裝容易。
3. 採用電磁式離合器及制動器，使封切袋子尺寸誤差最小。
4. 擠袋或阻袋，及印刷位置不正確時，機器自動停止。

Optional Equipment:

1. Servo motor control.