


KING
Machinery and
Engineering
Corp.



C TYPE

Injection Molding Machine

C Type Injection Molding Machine

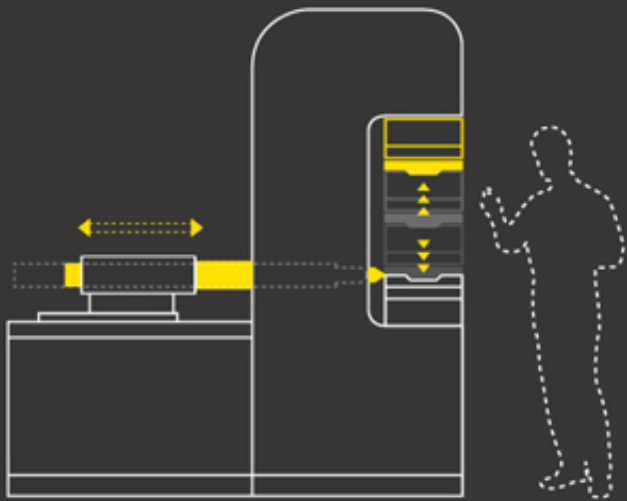

- Tie-bar less (C type) design gives more space for operation. Especially suitable for the power cord and connector with wire.
- Precision vertical clamping system (parallelism/ flatness : 0.02/ 100 mm) , heavy-duty tie-bars, and low-pressure mold clamping work together to greatly extend machine & mold life.
- With shuttle table 、 rotary table, pick and place products while molding finish, make production safe and efficient, then reduce the cost of production.
- Material injected through parting line to cavities.



Vertical Injection
Horizontal Clamping



Suitable For Wall
Thickness More



Suitable For Much
Injection Capacity



Safety Design
For Operator



Vertical Hydraulic
Clamping System

Model		
INJECTION UNIT		
Screw Diameter	mm	
Injection Capacity	cm ³	
Injection Pressure	kgf/cm ²	
Injection Weight	oz	
	gram	
Injection Rate	cc/s.	
Screw Speed	r.p.m.	
Screw Stroke	mm	
Nozzle Stroke	mm	
Nozzle Contact Force	ton	
CLAMPING UNIT		
Clamping Force	ton	
Minimum Mold Height	mm	
Opening Stroke	mm	
Maximum Daylight	mm	
Overall Size Of Platens	mm	
Size Of ShuttleTable	mm	
Shuttle Table Stroke	mm	
Diameter Of Rotary Table	mm	
Mold Station	Station	
Ejector Force	ton	
Ejector Stroke	mm	
ELECTRICAL EQUIPMENT & GENERAL		
Power Source	v/hz	
Drive Motor	kW	
Heater	kW	
Temperature Control Zone	zone	
Hydraulic System Pressure	kgf/cm ²	
Machine Dimension	m	
Machine Weight	ton	

KING'S Solution Corp.

Taiwan : No.457, Nanshang Rd., Guishan Dist, Taoyuan City 33392, Taiwan | sales@kingsmachinery.com.tw | Tel : +886-3-3218768 | Fax : +886-3-3218769

China : Bao Xin Industrial Park, Wu Village ,Chen Jiang Town, Hui Zhou City Guangdong | Tel : +86-752-3269005/07 | Fax : +86-752-3269360/350

www.injection.com.tw/ | www.facebook.com/Kingsmachinery/ | https://www.youtube.com/user/kingsmachinery/