


Plastic Recycling Twin-Screw Pelletizer

塑料回收雙螺桿製粒機

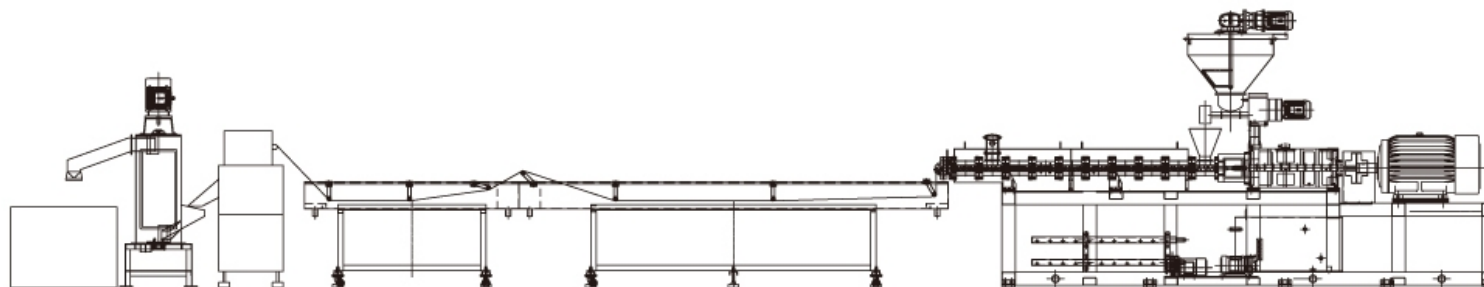

Specification

SPECIFICATION INFORMATION

適用原料	SUITABLE MATERIAL		TPU / PET / PC / PLA	
耗 電 量	POWER CONSUMPTION	kw	215	270
押出產能 (PET)	EXTRUDING OUTPUT(PET)	kg / hr	150 ~ 350	300 ~ 700
占地面積	MACHINE OCCUPANCY AREA	M (L x W x H)	15 X 5 X 5	
押出機 EXTRUDER				
螺桿直徑	SCREW DIAMETER	mm	Φ 62	Φ 72
螺桿長徑比	SCREW L / D RATIO	-	40 : 1	40 : 1
螺桿最高轉速	SCREW MAX SPEED	RPM	300	
螺桿扭矩	SCREW TORQUE	Nm / screw	1030	1750
螺桿樣式	SCREW TYPE	-	Brick	
驅動馬達	DRIVING MOTOR	HP	175 ~ 200	200 ~ 250
扭力限制器	TORQUE LIMITER	set	1	
真空系統	VACCUM SYSTEM	set	1	
溫度控制區	TEMPERATURE CONTROL	zone	7	10
體機式計量系統	VOLUMETRIC DOSING SYSTEM	kg x set	15 X 4	15 X 4
側進料計量系統	SIDE FEEDING SYSTEM	-	客製 / Customize	

ALL SPECIFICATION CAN BE ALTERED BY ORDER

SPECIFICATION INFORMATION

出條模頭 DISCHARGING DIE				
模頭孔徑	HOLE DIAMETER OF DIE	mm	客製 / Customize	
模頭孔數	HOLE QUANTITY OF DIE	mm	客製 / Customize	
溫度控制區	TEMPERATURE CONTROL	zone	1	1
冷卻水槽 WATER COOLING BASIN				
水槽長度	BASIN LENGTH	M	4	
水循環系統	WATER CIRCULATION SYSTEM	set	1	
除水風車	WATER-ELIMINATING BLOWER	HP	3	3
拉條式切粒機 PELLET CUTTING MACHINE				
驅動馬達	DRIVING MOTOR	HP	10	10
操作方式	OPERATING TYPE	-	Inverter	
型式	TYPE	-	Gantry	
震動篩選台 VIBRATION SCREENER				
驅動馬達	DRIVING MOTOR	HP	2	2
集料系統 RESIN COLLECTING SYSTEM				
輸送風車	CONVEY BLOWER	HP	2	
集料桶	RESIN COLLECTION TANK	kg	300	

ALL SPECIFICATION CAN BE ALTERED BY ORDER

