

# DOUBLE CAP PAD STUFFING MACHINE

Caps Equipment

Polaris




[www.dc-machine.com](http://www.dc-machine.com)





**DER CHENG MACHINERY CO., LTD.**

No. 2-1, Ln. 182, Gongye Rd., Longjing Dist.,  
Taichung City 43445, Taiwan  
Tel. +886-4-2639-0327 Fax. +886-4-2639-0813  
E-mail. [sales@dc-machine.com](mailto:sales@dc-machine.com)

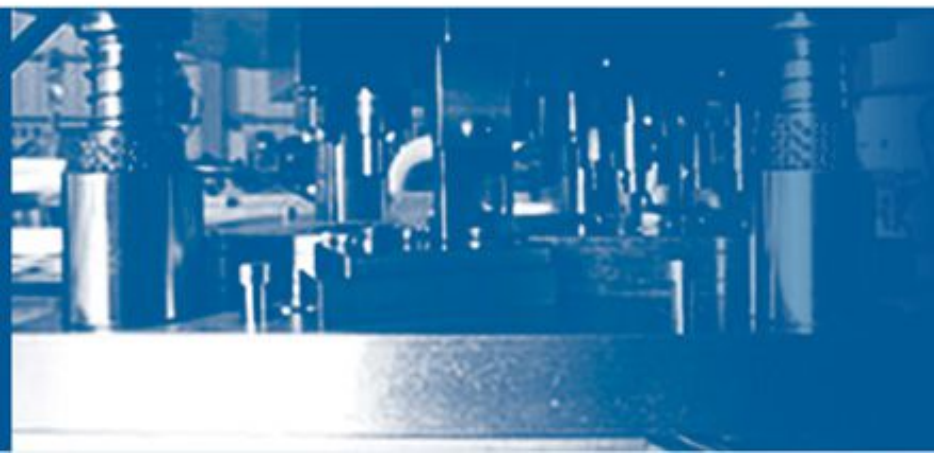

uCloud

## FEATURES

- With special mold design, gaskets and gasket pull part can be produced in the same process. The gasket and the aluminum foil are directly stamped to the cap bottom.
- PLC control system with touch human-machine interface.
- The cap contact surfaces are made of stainless steel.



## SPECIFICATIONS

Cavity Number	Productivity (pcs/min)
2	200 ↑
3	300 ↑

Cap Application	Productivity (pcs/min)	Units
Cap Diameter	25~ 50	MM
Cap Height	12~ 60	MM



# DOUBLE CAP PAD STUFFING MACHINE

Caps Equipment

## FUNCTIONS

- This machine is widely used in food and pharmaceutical caps, in which it is needed to insert the double-layer pad (aluminum foil and paper) into the bottom of the caps. The specially designed mold can produce a pull part in the aluminum foil to be easily opened.





# DOUBLE CAP PAD STUFFING MACHINE

Caps Equipment



[www.dc-machine.com](http://www.dc-machine.com)

