

PT460E Series Pressure Sensors

*SIMPLE INSTALLATION,
REPEATABILITY AND RELIABILITY*



Description

The Dynisco PT460E Series transducer is a $\pm 0.5\%$ sensor ideal for melt pressure applications requiring simple installation, repeatability and reliability. The PT460E transducers provide the industry standard 3.33 mV/V signal designed to work with most pressure indicators. The PT460E comes equipped with a six pin bendix connector. Optional thermocouple or RTD configurations are available to provide melt temperature. The PT460E features a 1/2-20 UNF thread for installation in standard transducer mounting holes and can be supplied with a variety of other electrical connections if desired.


Features

- Accuracy better than $\pm 0.5\%$
- DyMax® coated stainless steel wetted parts
- Proven sensor design
- 0 - 500 to 0 - 30,000 psi
- Internal 80% shunt calibration

Performance Characteristics	
Combined Error:	±0.5% FSO, (Including Linearity, Repeatability & Hysteresis)
Repeatability:	±0.2% FSO
Over Pressure:	2 x FSO or 35,000 psi (whichever is less)
Configuration:	Four active arm bonded Wheatstone bridge strain gage
Bridge Resistance:	Input: 345 Ohms minimum; Output: 350 Ohms ±10%
Output:	3.33 mV/V ±2.0%
Zero Balance:	±10% full scale
Input Voltage:	10 Vdc recommended, 12 Vdc maximum
Internal Shunt Calibration (R-Cal):	80% FSO ±1.0%
Insulation Resistance:	1,000 megohms at 50 Vdc

Temperature & Mechanical Characteristics	
Transducer Diaphragm:	
Maximum Diaphragm Temperature:	750°F (400°C)
Zero Shift (due to temperature change):	25 psi/100°F maximum (45 psi/100°C)
Electronics Housing:	
Maximum Temperature:	250°F (121°C)
Zero Shift (due to temperature change):	±0.05% full scale/°F maximum (±0.10% full scale/°C)
Sensitivity Shift (due to temperature change):	±0.02% full scale/°F maximum (±0.04% full scale/°C)
Mounting Torque:	500 inch/lbs. maximum
Standard Wetted Parts:	Dymax® coated 15-5 PH SST

Ordering Guide for PT460E Series

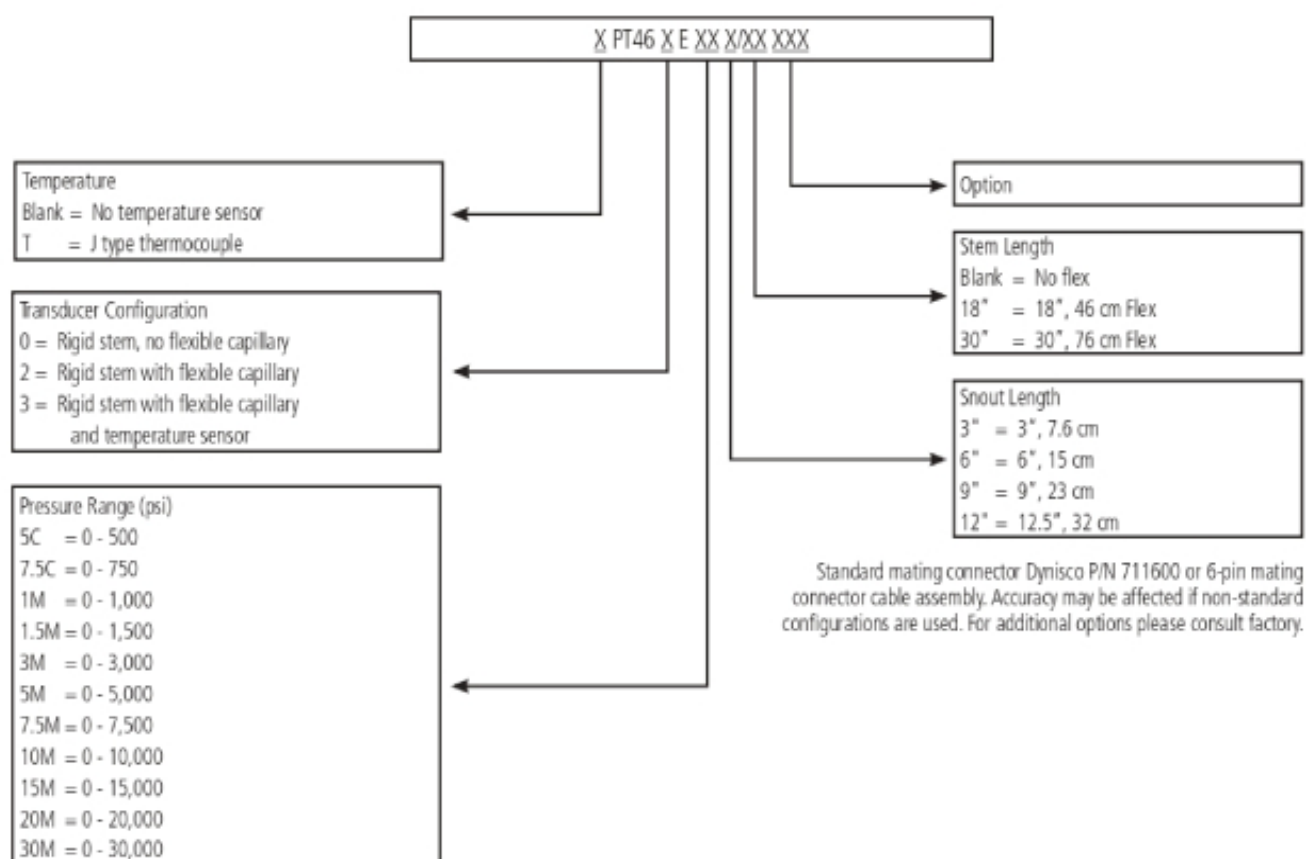

All dimensions are in inches (mm) unless otherwise specified.
©2016, Dynisco reserves the right to make changes without notice.
Refer to www.dynisco.com for access to Operator Manual and other support documentation.
DSPT460E
Rev. 0212

Dynisco
38 Forge Parkway
Franklin, MA 02038
USA

Hotline 1-800-Dynisco
www.dynisco.com
Phone +1 508 541 9400
Fax +1 508 541 6206
Email infoinst@dynisco.com

Dynisco Europe, GmbH
Pfiaffemst. 21 Phone +49 71 31 297 0
74078 Heilbronn Fax +49 71 31 297 166
Germany Email dyniscoeurope@dynisco.com

