



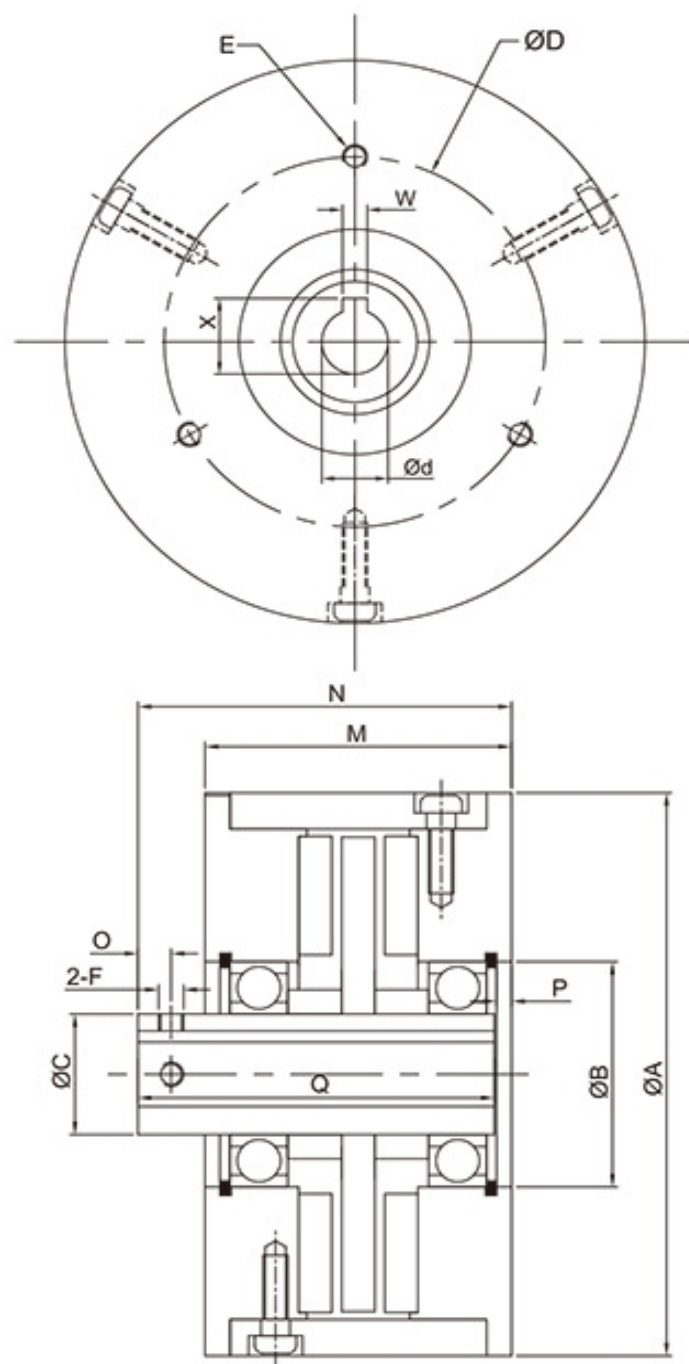


型 號 Model		CHT2S5AA	CHT005AA	CHT010AA	CHT030AA	
靜摩擦扭力 Static torque		Kgcm (Nm) 0.5~4.0 (0.05~0.40)	0.5~7.5 (0.05~0.75)	2~15 (0.2~1.5)	3~30 (0.3~3.0)	
容許滑動功率 Heat Dissipation (W)		20	30	45	70	
轉速 Speed (RPM) Max.		1800	1800	1800	1000	
慣性矩 Inertia J*10 ⁻⁴ (kg*m ²)	本體 Flange	4.52	7.65	11.4	55.2	
	軸心 Shaft	0.26	0.41	1.08	6.3	
徑方向 Radial	A	60	70	82	118	
	B	28	28	47	62	
	C	12	15	25	35	
	D	40	46	60	76.2	
	E	M3*6L	M3*6L	M4*12L	M5*12L	
	F	M3	M3	M4	M4	
軸方向 Axial	M	35	37	50	55	
	N	42	45	57	65	
	O	3	4	4	6	
	P	1.8	1.8	1.5	1.5	
	Q	40	43	54	61	
鍵槽 Keyway	W	-	3	5	5	
	X	-	9.4	17.3	18.3	
孔徑 Bore		d	6	8	15	16

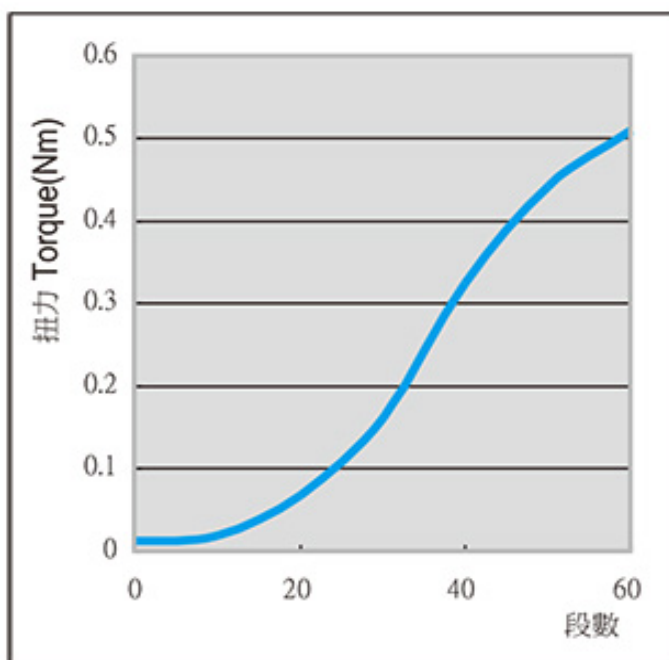


CHT2S5


Grade

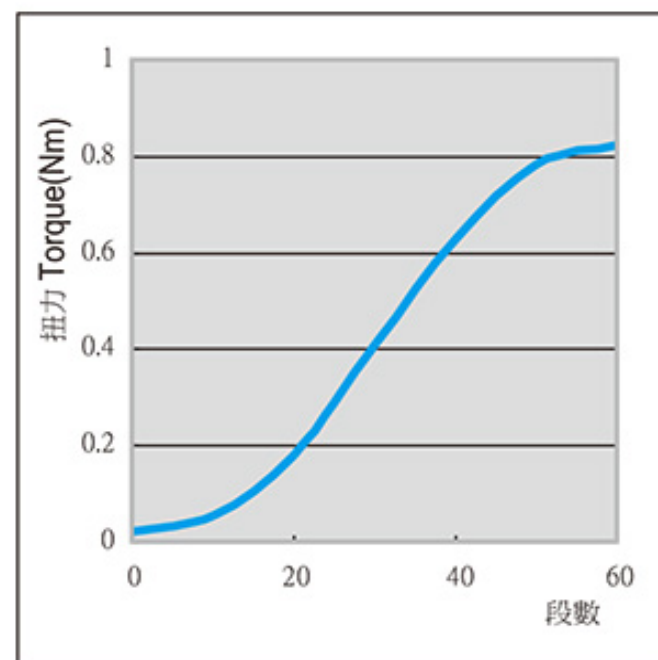

CHT005

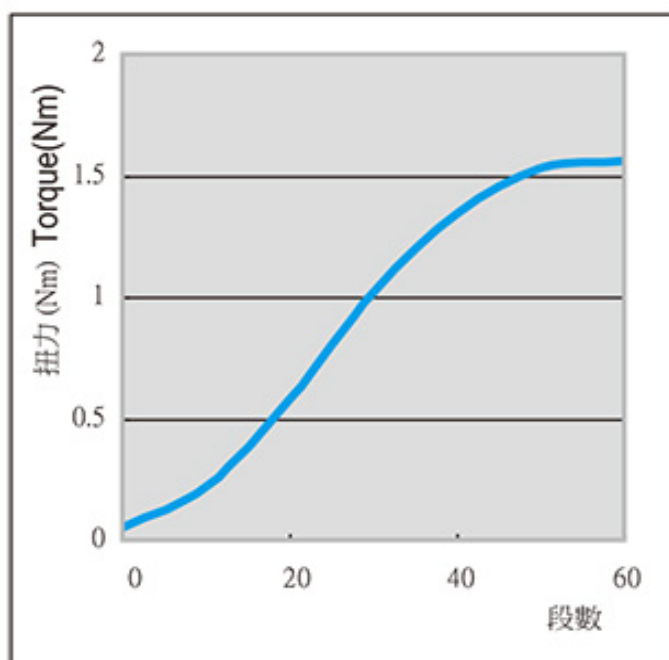

CHT010

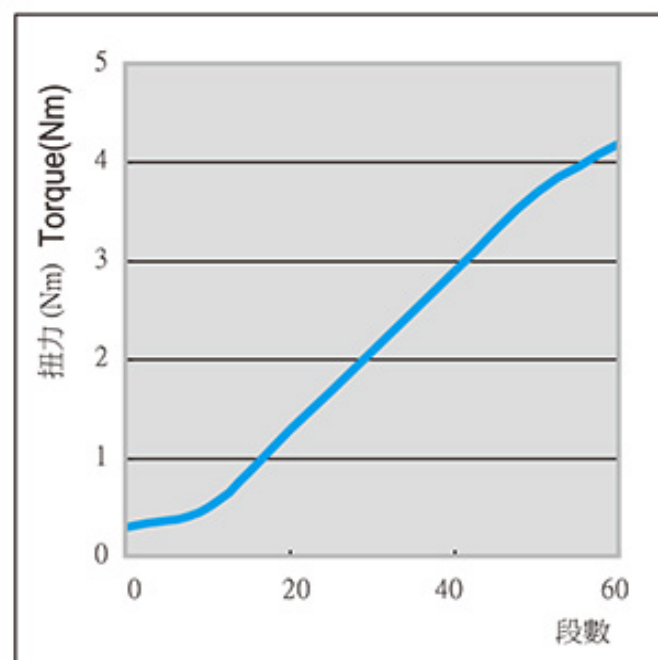

CHT030