


ZKC Series


磁粉式電磁離合器 Magnetic Particle Clutch

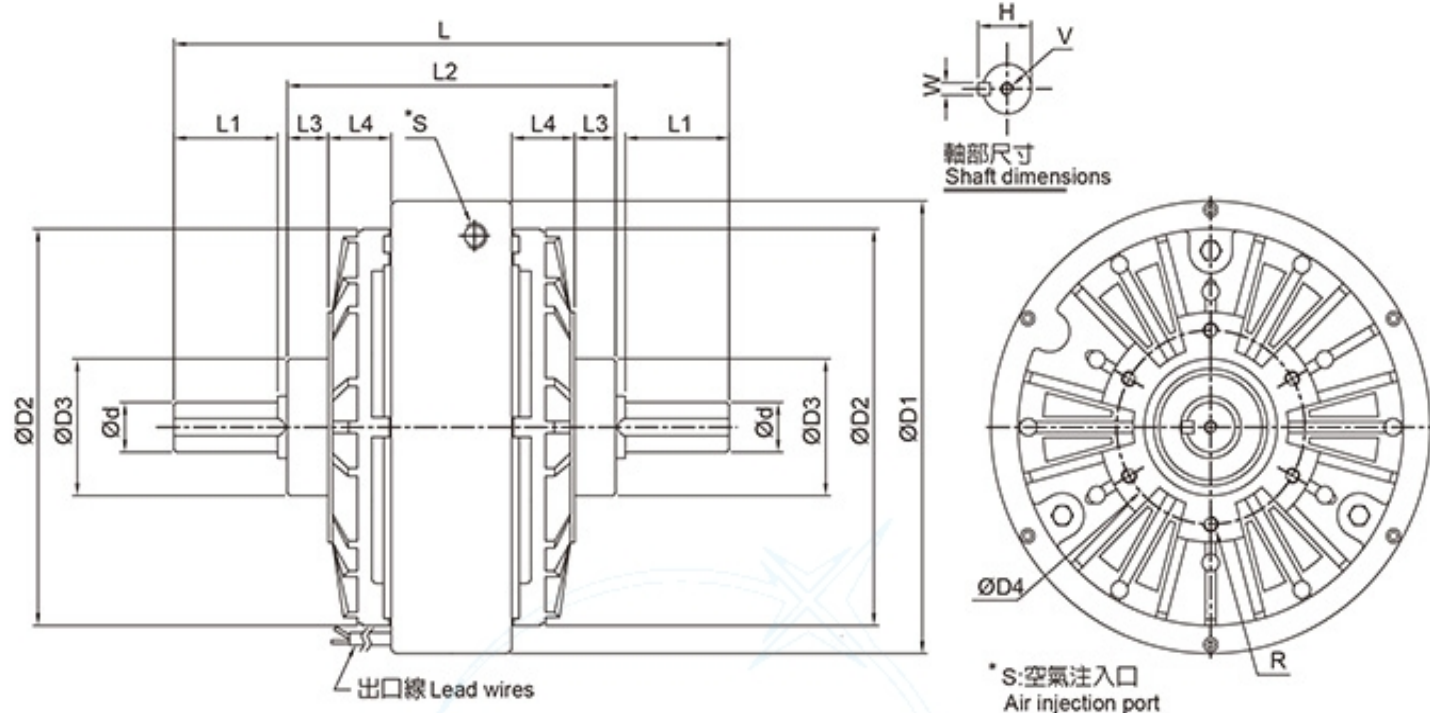

型 號 MODEL	ZKC1S2AA	ZKC2S5AA	ZKC005AA	ZKC010AA	ZKC020AA	ZKC040AA
定格轉矩 [kgm](Nm) Rated torque	1.2 (12)	2.5 (25)	5 (50)	10 (100)	20 (200)	40 (400)
容量 Capacity DC24V (75°C)	電流 (A) Current	0.94	1.24	2.15	2.4	3.5
	電力 (W) Power	22.5	30	51.5	57.6	84
	時定數 (s) Time to establish torque	0.1	0.12	0.13	0.25	0.4
慣性矩 J Moment of inertia (kgm ²)	入力側 Input side	1.34*10 ⁻³	3.8*10 ⁻³	9.5*10 ⁻³	3.5*10 ⁻²	9.15*10 ⁻²
	出力側 Output side	4.90*10 ⁻⁴	1.49*10 ⁻³	4.8*10 ⁻³	2.5*10 ⁻²	6.89*10 ⁻²
強制空冷容 許滑動功率 Allowable slippage rate with forced-air cooling	風壓 (Pa) Air pressure	3*10 ⁴	5*10 ⁴	1*10 ⁵	6*10 ⁴	5*10 ⁴
	風量 (m ³ /min) Air volume	0.2	0.4	0.6	1.1	1.6
	功率 (W) Power	250	380	700	1100	1900
重量 Weight (kg)	5.2	9	14.5	37	53	100
最高轉速 Maximum speed (r/min)	1800					
磁粉重量 Weight of powder (g)	20	33	60	140	225	370
外型尺寸 Exterior dimensions	D1	152	182	219	276	325
	D2	126	159.5	195	260.5	301
	D3 (g7)	42	55	74	100	110
	D4	64	78	100	140	150
	L	191.7	230	293.9	359	407.2
	L1	29.5	43	55	65	69
	L2	124	136	172	216	250
	L3	15	17	30	28	30
	L4	25.5	26	28	46	56
	d (h7)	15	20	25	30	35
	H	17	22	28	33	38.5
	W	5	7	10	12	
	V	M4*0.7P*8L	M5*0.8P*10L	M6*1P*12L	M10*1.5P*20L	
	R	6-M6*1P*10L		6-M10*1.5P*15L		8-M12*P1.75*20L
	S	1/8		1/4		3/8


【標準扭力特性】（代表範例）

Special features of standard torque (reference only)

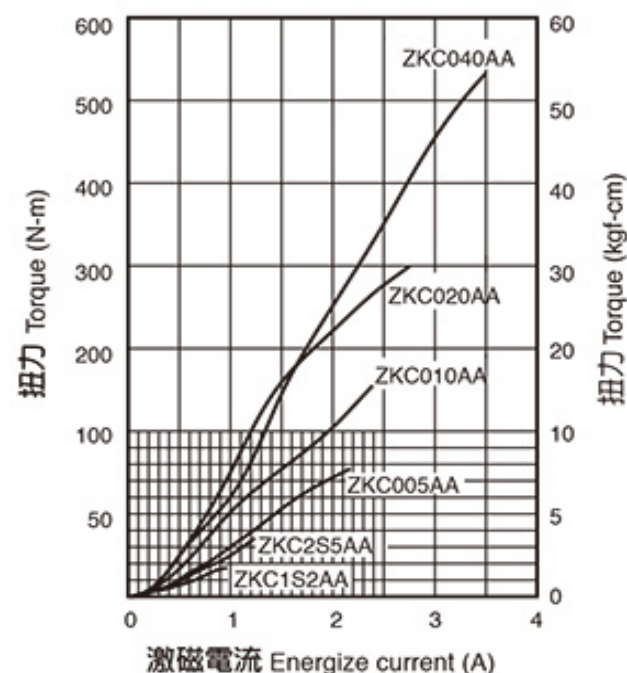

【所容許的連續滑動工作率特性（自然冷卻時）】

Allowable sustained operating efficiencies (natural cooling)

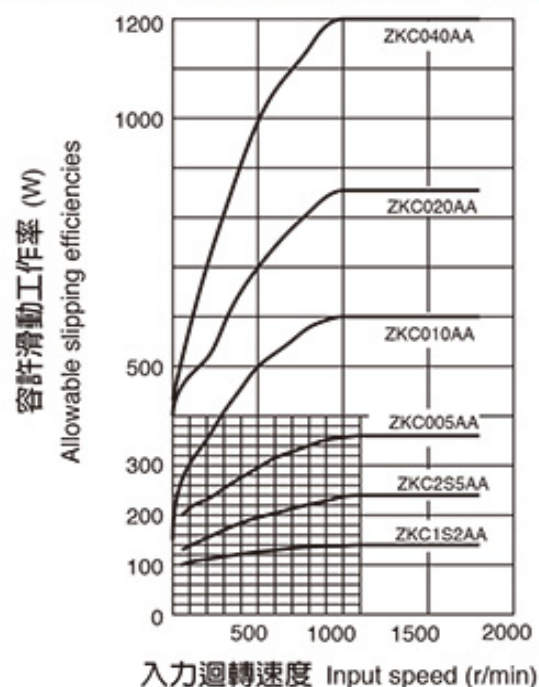

【所容許的連續滑動扭力特性（自然冷卻時）】

Allowable Sustained torque levels (natural cooling)

