

PLASTIC PELLET MAKING MACHINE

塑膠再生膠粒機



KS-DX100S

KS-DX100S ONE STAGE DIE FACE CUTTER WATER COOLING SIDE FORCE TYPE PLASTIC PELLET MAKING MACHINE WITH WASTE STORAGE TANK, AUTO CONVEYOR, METAL DETECTOR, VACUUM SYSTEM FOR VENT, VIBRATING SYSTEM.




光興塑膠機械廠股份有限公司
KUNG HSING PLASTIC MACHINERY CO., LTD.

總公司：嘉義縣太保市嘉太工業區中興路13號
HEAD OFFICE:
13 CHUNG HSING ROAD, CHIA TAI INDUSTRIAL
DISTRICT, CHIA-YI HSIEN, TAIWAN

TEL : 886-5-2374466 (12 LINES)
FAX : 886-5-2376971 . 2381029
http : // www.kunghsing.com.tw
E-mail : ks.sales@kunghsing.com.tw
ks.service@kunghsing.com.tw

SPECIFICATION: 規格

型 式	MODEL	KS-DXS SERIES DIE FACE CUTTER WATER COOLING SIDE FORCE TYPE 熱切水冷式、側押式				KS-DX SERIES DIE FACE CUTTER WATER COOLING TYPE 熱切水冷式					KS-VX SERIES WATER COOLING TYPE 水冷式				
		KS-DX85S	KS-DX100S	KS-DX120S	KS-DX150S	KS-DX65	KS-DX85	KS-DX100	KS-DX120	KS-DX150	KS-VX65	KS-VX85	KS-VX100	KS-VX120	KS-VX150
FEATURE	MATERIAL TO BE USED 使用樹脂	HDPE, LDPE, LLDPE, PP (PRODUCTION OUTPUT IS ACCORDING TO MATERIAL 實際產量視原料而定)													
性 能	MAX. EXTRUSION OUTPUT 最大挤出量	330 kg/hr	400 kg/hr	500 kg/hr	800 kg/hr	180 kg/hr	300 kg/hr	380 kg/hr	470 kg/hr	750 kg/hr	160 kg/hr	280 kg/hr	350 kg/hr	420 kg/hr	700 kg/hr
FIRST EXTRUDER	SCREW DIA. (mm) 螺旋桿直徑	85 φ	100 φ	120 φ	150 φ	65 φ	85 φ	100 φ	120 φ	150 φ	65 φ	85 φ	100 φ	120 φ	150 φ
	SCREW L/D 螺旋桿比例	37:1													
	CYLINDER COOLING BLOWER 圓筒筒冷卻	1/2 HPx5	1/2 HPx6	1/2 HPx6	1/2 HPx7	1/2 HPx4	1/2 HPx5	1/2 HPx6	1/2 HPx6	1/2 HPx7	1/2 HPx4	1/2 HPx5	1/2 HPx6	1/2 HPx6	1/2 HPx7
	DRIVING MOTOR 傳動馬力	75 HP	100 HP	150 HP	200 HP	40 HP	75 HP	100 HP	150 HP	200 HP	40 HP	75 HP	100HP	150HP	200HP
	HEATER CAPACITY 電熱容量	45 KW	60 KW	75 KW	90 KW	35 KW	45 KW	60 KW	75 KW	90 KW	35 KW	45 KW	60 KW	75 KW	90 KW
一段式挤出機	SCREEN CHANGER 換網裝置	HYDRAULIC TYPE 油壓式													
	TEMPERATURE CONTROL (points) 溫度控制	7	8	9	11	5	7	8	9	11	6	7	8	9	11
DIE 模 頭	TYPE 型 式	ROUND TYPE 圓型式模									FLAT TYPE 平行式模				
	NUMBER OF EXTRUDED STRIPS 成形條數	MULTI HOLES 多孔式									13	15	22	25	36
CUTTING & COOLING EQUIP 切粒和冷卻裝置	CUTTING DEVICE 切粒裝置	DIE FACE CUTTER 模頭熱切式									CUTTING AFTER COOLING 水冷後切式				
	DRIVING MOTOR 傳動馬力	2 HP	2 HP	3 HP	3 HP	2 HP	2 HP	2 HP	3 HP	3 HP	2 HP	5 HP	5 HP	5 HP	7 1/2 HP
	COOLING BLOWER 冷卻裝置	WATER RING 噴水式 (MADE OF STAINLESS STEEL 不銹鋼製水槽)									DIPPING TYPE 浸水式				
DRYING DEVICE 脫水乾燥裝置	TYPE 型 式	STAINLESS STEEL CENTRIFUGE DRYER 不銹鋼脫水槽									SUCKING TYPE 吸水式				
	DRIVING MOTOR 傳動馬力	3 HP	3 HP	5 HP	7 1/2 HP	3 HP	3 HP	3 HP	5 HP	7 1/2 HP	3 HP	3 HP	3 HP	5 HP	5 HP
COLLECTING TANK 成品收集筒	CONVEYOR 成品輸送機	3 HP	3 HP	5 HP	7 1/2 HP	3 HP	3 HP	3 HP	5 HP	7 1/2 HP	3 HP	3 HP	3 HP	5 HP	7 1/2 HP
	CYCLONE 篩料桶	1 SET													
SCREW TYPE SIDE FORCE FEEDING DEVICE 側 押 裝 置	SCREW MOTOR 側押桿馬力	10 HP	10 HP	10 HP	15HP										
	MIXER MOTOR 攪拌馬力	2 HP	2 HP	3 HP	3 HP										
	WASTE COLLECTING STORAGE (kg) 廢料儲存筒	600	900	900	1200										
SECONDARY EXTRUDER	SCREW DIA.(mm) 螺旋桿直徑	85 φ	100 φ	120 φ	150 φ	65 φ	85 φ	100 φ	120 φ	150 φ	65 φ	85 φ	100 φ	120 φ	150 φ
	SCREW L/D 螺旋桿比例	12:1													
	CYLINDER COOLING BLOWER 圓筒筒冷卻	1/2 HPx2	1/2 HPx2	1/2 HPx3	1/2 HPx3	1/2 HPx2	1/2 HPx2	1/2 HPx4	1/2 HPx5	1/2 HPx7	1/2 HPx2	1/2 HPx2	1/2 HPx2	1/2 HPx3	1/2 HPx3
	DRIVING MOTOR 傳動馬力	25 HP	30 HP	40 HP	60 HP	20 HP	25 HP	30 HP	40 HP	60 HP	20 HP	25 HP	30 HP	40 HP	60 HP
	HEATER CAPACITY 電熱容量	25 KW	30 KW	38 KW	45 KW	20 KW	25 KW	30 KW	38 KW	45 KW	20 KW	25 KW	30 KW	38 KW	45 KW
二段式挤出機	SCREEN CHANGER 換網裝置	HYDRAULIC TYPE 油壓式													
	TEMPERATURE CONTROL (points) 溫度控制	5	5	6	7	4	5	5	6	7	4	5	5	6	7
OPTIONAL DEVICE 任意訂購裝置	SPIRAL TYPE FEEDING DEVICE FOR FILM SCRAP PROCESSING, WASTE STORAGE, CATERPILLAR TYPE AUTOMATIC CONVEYOR, CRUSHER, VACUUM SYSTEM FOR VENT (DEGASSING SYSTEM), VIBRATING SYSTEM, AGGLOMERATING MACHINE, METAL DETECTOR 螺旋式膠膜加壓裝置、廢料儲存筒、履帶式輸送機、粉碎機、真空排氣裝置、篩選裝置、粉磨機、金屬探測器。														

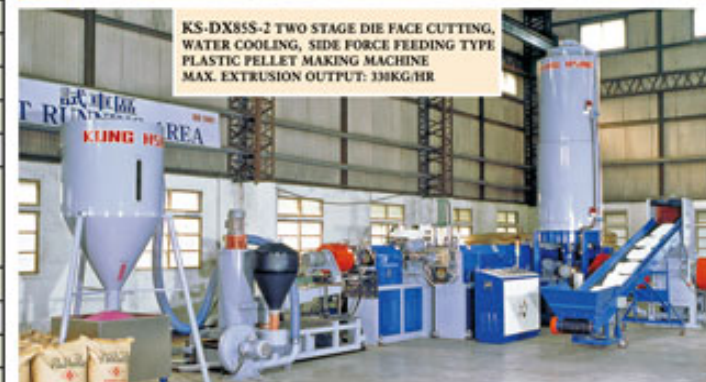

● SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

● 由於設計上或製造上的必要，有時將變更規格或尺寸。

KS-DX100S-2 TWO STAGE DIE FACE CUTTING, WATER COOLING, SIDE FORCE FEEDING TYPE PLASTIC PELLET MAKING MACHINE WITH CRUSHER FOR ROCK, CRUSHER FOR FILM, THE METAL DETECTOR, AND THE AUTO CONVEYOR. MAX. EXTRUSION OUTPUT: 400KG/HR



KS-DX150S-2 TWO STAGE DIE FACE CUTTING, WATER COOLING, SIDE FORCE FEEDING TYPE PLASTIC PELLET MAKING MACHINE WITH HYDRAULIC SCREEN CHANGER, WASTE FILM COLLECT AND VACUUM SYSTEM FOR VENT



TWO STAGE DEVICE



KS-DX100S-2 TWO STAGE DIE FACE CUTTER WATER COOLING SIDE FORCE TYPE PLASTIC PELLET MAKING MACHINE WITH WASTE STORAGE TANK, AUTO CONVEYOR, METAL DETECTOR, VACUUM SYSTEM FOR VENT



Kung Hsing
PLASTIC MACHINERY

ISO 9001 CE
Taiwan