

Powder Conveying and Dust Collecting System /All Kinds Of Plate Tpye Filter 粉體輸送/集塵設備/各式板式濾網



Filter mesh of the
barrel-top
桶頂板式濾網


Brand-New Function
新功能

New Patent
新型專利

Round Negative-Pressure Tank

圓形負壓桶

GF-450-EA

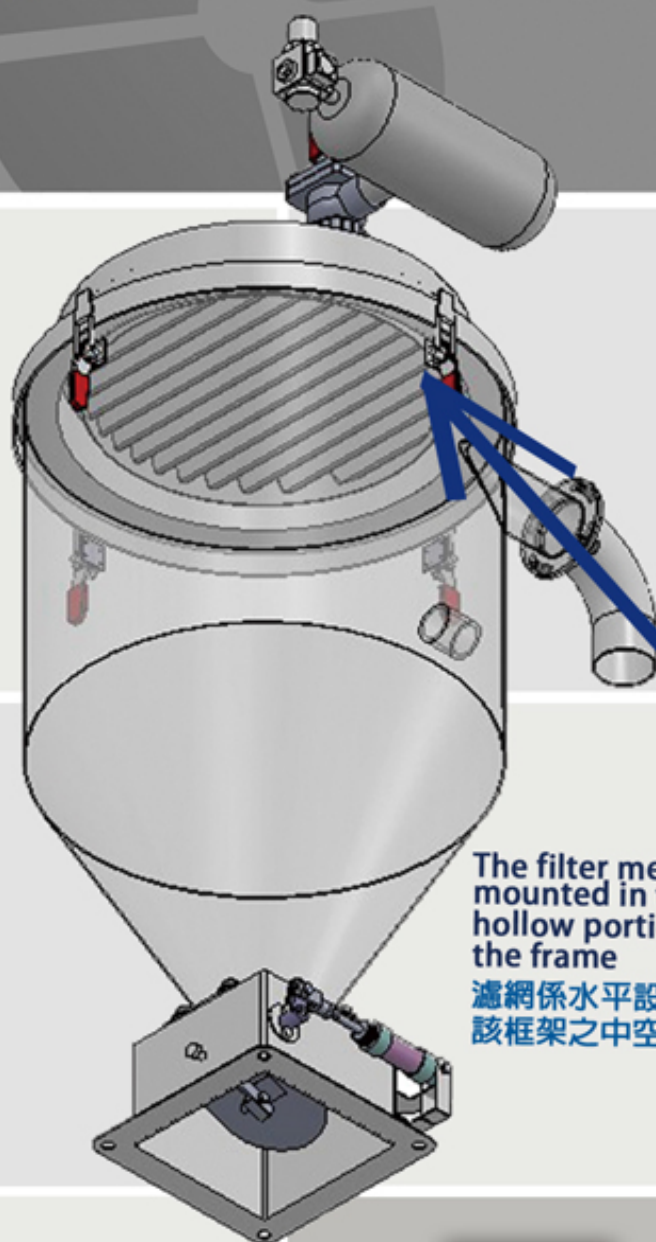

The filter mesh is
mounted in the
hollow portion of
the frame
濾網係水平設置於
該框架之中空部



濾網專利號碼: M520934
Filter Patent Number:
M520934

Filter mesh of the barrel-top 桶頂板式濾網

Newly Designed!
Brand-New Product!
新研發!
全新產品!

Weight: 1.64kg
重量1.64kg
輕盈好拿取



波形間格
Waveform
Shaping



Space can be
shortened
所占空間可縮減

The porous corrugated
material with
PE sintering
PE燒結之多孔性浪板設計

GR-EA

FEATURES:

- The filter mesh in the barrel top occupies less space and height than the old negative pressure barrel.
- The chance for powder to float inside the barrel is fewer and increase air volume.
- The filter mesh will not get clogged.
- The filter mesh will not get elastic fatigue.
- The filter mesh can be installed with a variety of models.
- The filter mesh easy to clean up and don't need to replacement often.
- The service life of filtrating element may vary with powder kinds. Normal service life is approximately 2-5 years.

特點：

- 濾網在桶內頂端比舊式負壓桶內，較不占空間與高度。
- 粉體進入桶內上飄率較少，增加出風量。
- 濾網不彈性疲乏且不阻塞。
- 可配合各式的機種安裝。
- 好清理，不需常換網。
- 逆洗時不卡網。
- 濾材使用壽命依粉塵種類而定、通常壽命約2-5年。

粉體輸送過濾桶 (內裝板式濾網)

GF-600-A3

- 負壓式粉體輸送過濾桶，有效防止粉體外洩造成工作環境污染。
- 內置先進板式濾材、可過濾極細微粉塵 $10\mu\text{m}$ 。
- 設有氣壓逆洗確保不阻塞。
- 內置濾網可放置二-四片。
- 濾材使用壽命依粉塵種類而定、通常壽命約2-5年。
- 桶身材質：304#不鏽鋼。

安裝在粉粒體負壓輸送、過濾系統



- The powder filtration device is a negative-pressure design that effectively prevents powder splash, resulting in environmental pollution.
- Equipped with advanced plate type filtrating element, allows for filtrating extra-fine particle up to 10 μm .
- Designed with pneumatic type reversed cleaning function to avoid blocking.
- Available to fit with 2 ~ 4 pieces of filtrating screen.
- The service life of filtrating element may vary with powder kinds. Normal service life is approximately 2-5 years.
- Material of filtration tank: 304 stainless steel.

Dust Collector

(Built-in German-made filter plate)

集塵機(內裝德製板式濾網)

GH-D

燒結板式濾材之優點:

- 以PE塑材燒結而成的板式濾材，堅固耐磨損。
- 斷面結構採蜂巢型設計，過濾面積大而無死角。
- 粉塵分離效率高，因而出口含塵濃度可達 $< 1\text{mg}/\text{M}^3$ (依German TA Air Standard)
- P.T.F.E 表面塗裝、孔隙 $2-3\mu\text{m}$ ，可過濾極微細粉塵，配合氣壓衝逆洗，保持穩定差壓。
- 使用壽命長，因粉塵而異，操作時間約2- 5年。
- 以PE燒結濾板製作之集塵機所佔面積約為傳統袋式集塵機之40%。



Field Installation
現場安裝



Advantages of Sinter-plate Filters:

- PE sinter-plate filters features rigid and no abrasion.
- Compact construction thanks to extended-surface matrix.
- High separation efficiency results at low particulate level in clean gas $< 1\text{mg}/\text{M}^3$ measured to German TA Air standard.
- Surface filtration with PTFE coating ($2-3\mu\text{m}$ opening) and the automatic jet-pulse cleaning of filter elements keep a constant pressure drop and clean gas values.
- Long useful life, ab. 2-5 operation years respectively.
- 2.5 times less space required than for conventional bag filter house.



The backwash effect
逆洗效果

High pressure plate-type dust collector
(automatic backwashing system)

高壓板式集塵機 (自動逆洗系統)



GH-B

The service life of filtrating
element may vary with powder
kinds.
Normal service life is approximately
2-5 years.

濾材使用壽命依粉塵種類而定、通
常壽命約2-5年。




All Kinds Of Plate Type Filter

各式板式濾網

GR-EC

Filter
(Made In Germany)
德製濾網

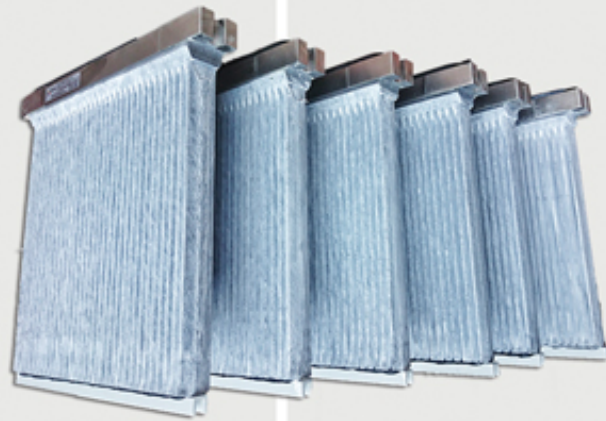

GR-EB

Filter
(Made In Taiwan)
台製濾網

GR-EA

Filter mesh of the
barrel-top
桶頂板式濾網





新巨機械有限公司
GREMA MACHINERY CO., LTD.

台灣434台中市龍井區麗水里龍港路316巷29號

No.29, Ln. 316, Longgang Rd., Longjing Dist.,
Taichung City 434, Taiwan

Tel: 886-4-2639-2875 • 2639-4575

Fax: 886-4-2639-0396

E-mail: shin.giant@msa.hinet.net

<http://www.grema.com.tw>