

SASI

Spout Inserting & Sealing Machines

SI



SASI Series



SI-R Series



www.dahbah.com.tw



DAH BAH
QUALITY PROFESSIONAL INNOVATION

Spout Inserting & Sealing Machines

Semi Automatic Spout Inserting & Sealing Machine

■ SASI Series

Specification :

Model No.	SASI Series
Bag Width	A: 140 ~ 250 mm
Bag Length	B: 200 ~ 300 mm
Max. Sealing Mould Width	C: 160 mm
Standard Spout Dimension (L x W x H x D)	40 mm x 16 mm x 31 mm x 17 mm Other size can be specified as requested
Machine Speed	12 - 15 pouch / min.
Machine Size	L 1700 x W 2700 x H 2000 mm

Features :

Application & Materials

- Laminated material with appropriate stiffness 100 - 120u.

Control Section


- PLC control system.
- Touch screen with control panel.
- Automatic temperature control system.
- Constant sealing time control system.
- Pouch counter manager.

Feeding Section

- Automatic spout feeding system with vibrating feeder.
- Out of spout alarm system.
- Automatic pouch feeding system with suction pad pick up device.
- Out of pouch alarm system.

Sealing Section

- Pneumatic controlled spout-sealing station.
- Pneumatic controlled spout-cooling station.

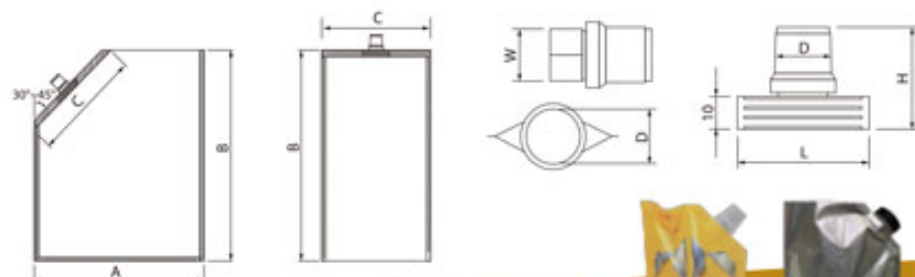

Spout Inserting & Sealing Machine (Rotary Table Type)

■ SI-R Series

Specification :

Model No.	SI-30R Series
Bag Width	A: 110 ~ 200 mm
Bag Length	B: 160 ~ 300 mm
Max. Sealing Mould Width	C: 120 mm
Standard Spout Dimension (L x W x H x D)	40 mm x 16 mm x 31 mm x 17 mm Other size can be specified as requested
Machine Size	L 850 x W 1100 x H 1200 mm

Features :

Application & Materials

- Sealable laminated bag with sealable spout.

Table

- Rotary type, single table makes operator easily locate the bag sealing position.

Spout Sealing Section

- Pneumatic controlled spout-sealing stand easy for operator to control the sealing pressure.
- Equipped with automatic temperature controller provides accurate sealing temperature.
- Equipped with timer for sealing time control ensures each pouch sealing quality.
- Equipped with foot-touch type operation system, easy for operation.

Optional Accessories

- Bag-angle cutting device.
- Spout sealing mould.

Spout Position

- On bag open top or 30°~45° of bag corner.



* The working speed depends on the material condition and bag size.
* Due to machine development, above information may change without notice.



Add. No. 69-10, Sec. 2, Chung Shin Rd., Tall Dist., Taichung City 412, Taiwan
Tel. +886-4-2483-2477 Fax. +886-4-2483-0852
E-Mail. dahbah@dahbah.com.tw website. www.dahbah.com.tw