



# PP / PE LAMINATION MACHINE FOR FLEXIBLE PACKAGING FILM

FK/LAFM-100-1400



Extrusion Excellence

[www.fki.com](http://www.fki.com)

FK/LAFM-100-1400

# PP / PE LAMINATION MACHINE FOR FLEXIBLE PACKAGING FILM




Design Line Speed

250 MPM



Max. Running Speed

220 MPM




Roller width

1400 mm



Lamination Thickness

0.01~0.04 mm

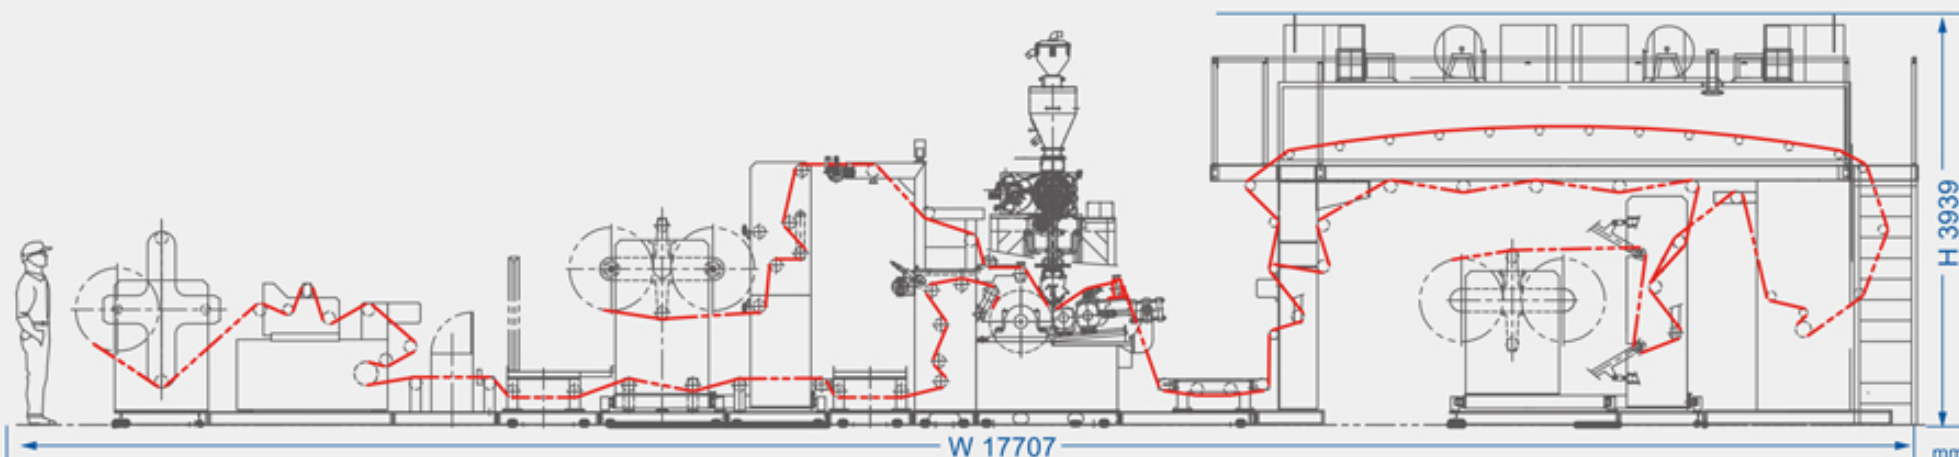

Extruder : 100mm, 100HP, L/D 32:1

Mono Layer T- Die

Primer Coating & Drying Unit : Horizontal Type, Drying Length 5.5m, Heating Capacity 101KW

Main Unwinder : 800mmΦ, Bottom Cutter

Lamination Unit : 600mmΦ Chill Roller, FKI Made

Sandwich Unwinder : 800mmΦ, Bottom Cutter

Rewinder : 800mmΦ, Bottom Cutter

Drive & PLC : ALLEN BRADLEY, USA

AVG. Power Consumption : 147KW / 204A

Max. Extrusion Capacity : 320 kg/hr

Joyhoku, Japan

Drive Motor : 7.5HP x 2, 3" + 6" Air Shaft

Drive Motor : 15 HP

Drive Motor : 7.5HP x 2, 3" + 6" Air Shaft

Drive Motor : 10 HP x 2, 3" + 6" Air Shaft

17" Industrial PC, ADVANTECH, Taiwan

Machine Size : 19 x 13 x 5m (L x W x H)

We reserve the right to make technical changes without prior announcement. All rights reserved. ©2018 FONG KEE INTERNATIONAL MACHINERY CO., LTD.

Designed by Polarix 2018-07-+886-4-24517079



**FONG KEE INTERNATIONAL MACHINERY CO., LTD.**

No. 168, Cheng Pei First Rd., Yongkang Dist., Tainan City 71042, Taiwan

Tel. +886-6-2532157

Fax. +886-6-2533079

Email. sales@fki.com

[www.fki.com](http://www.fki.com)

uCloud

