

Servo Motor Driven Garbage Bag Making & Folding Machine

伺服馬達驅動電腦按鍵式 垃圾袋自動製袋機



折袋機面版 Folding Machine Control Panel

SHGF



主機面版 Main-Machine Control Panel



伺服動力

興享機器興業有限公司
SING SIANG MACHINERY CO., LTD.

70969台灣台南市和順工業區永安路66號 TEL : +886-6-356-3297 FAX : +886-6-356-7267

66 Yung-An Road, Ho-Sun Industrial, Tainan, Taiwan

<http://www.bag-machine.tw>

Email: ssmtaiwan@gmail.com

Toll-Free Service Hot line: 0800-030-567


Web Site: www.興享.tw




規格 SPECIFICATION :

型 號	Model	30	36	42	50	60
摺 袋 寬	Folding "W"	28	34	40	48	58
摺 袋 長	Folding "L"	40"	40"	60"	60"	60"
封切厚度	Thickness (mm)	0.01~0.2	0.01~0.2	0.01~0.2	0.01~0.2	0.01~0.2
長度誤差	Length Tolerance	+ 1 mm	+ 1 mm	+ 1 mm	+ 1 mm	+ 1 mm
每 分 鐘 產 量	Production Per Min.(pc)	60	50	40	40	30
主 機 傳 動 馬 力	Main Body Driving Motor(AC)	2 HP	2 HP	2 HP	2 HP	2 HP
副 機 傳 動 馬 力	Sub Body Driving Motor(AC)	1 HP	1 HP	1 HP	1 HP	1 HP
全 台 備 電	Power Required	5.5 kw	6.0 kw	7.0 kw	8.0 kw	9.0 kw
空 壓 壓 力	Air Source	5 kg~7 kg	5 kg~7 kg	5 kg~7 kg	5 kg~7 kg	5 kg~7 kg
機 械 尺 寸	Dimension LxWxH (cm)	A 1900x1428x1440 B 2900x1428x1300	1900x1570x1650 2900x1570x1300	1900x1730x1650 2900x1730x1300	1900x1930x1650 2900x1930x1300	1900x2190x1650 2900x2190x1650
機 械 重 量	Machine Weight (kg)	1400	1650	1900	2150	2400
裝 箱 尺 寸	Measurement LxWxH (cm)	A 2100x1600x1600 B 3100x1600x1500	2100x1800x1800 3100x1800x1800	2100x1900x1800 3100x1900x1800	2100x2100x1800 3100x2100x1800	2100x2400x1800 3100x2100x1800
裝 箱 重	Gross Weight (kg)	1700	1950	2250	2550	2850

Specification are subject to change without notice (變更設計恕不另行通知)

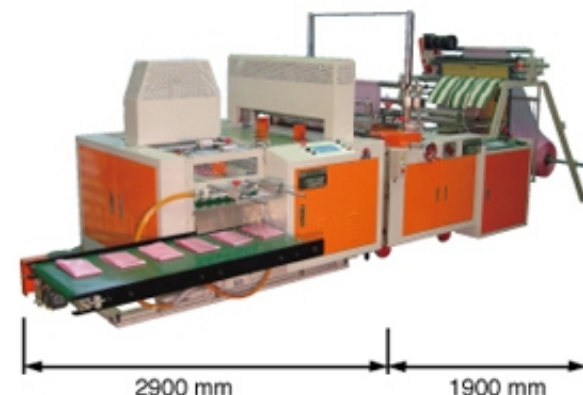

拆袋過程 Folding Process :

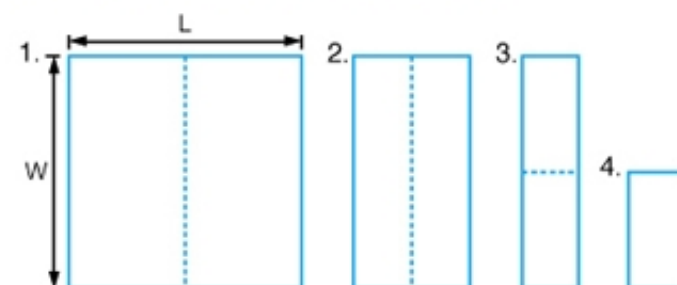

特色 :

1. 伺服馬達驅動，進料流暢，尺寸精準。
2. 配合封切機，每張自動摺疊，省時省力。
3. 可依計數器之設定，一定成所需張數。
4. 可依袋寬需要摺成三摺或四摺包裝方便快速。
5. 利用電磁配合氣壓控制，調整快速容易。

Features :

1. Servo driven rolls provide smooth consistent bag delivery and precise cut offs.
2. With this sealing & cutting machine, each sheet folds automatically. It saves time and labor.
3. Number of sheet to be processed can be set with Auto-Digital Counter.
4. Depending on width, bags can be folded in three or four to speed up packaging.
5. Easy to adjust using pneumatic controls with electromagnet.

For All Your Plastic Bags Needs