

5-LAYER CO-EXTRUSION BLOWN FILM MACHINE

五層共擠押吹膜機

► FIDP Series



7-LAYER CO-EXTRUSION BLOWN FILM MACHINE

七層共擠押吹膜機

► SIDP Series



其陽工業股份有限公司
Chyi Yang Industrial Co., Ltd.
333 桃園市龜山區廣湖三街11號
No.11, Dinghu 3rd St., Guishan District, Taoyuan
City 333, Taiwan

TEL : 886-3-328-8686
FAX : 886-3-328-3737
E-Mail : cymw@cymw.com.tw
[http : // www.chiyi.com](http://www.chiyi.com)



其陽工業股份有限公司
Chyi Yang Industrial Co., Ltd.

5-LAYER CO-EXTRUSION BLOWN FILM MACHINE 五層共擠押吹膜機

MODEL NO. 型號	FIDP-45	FIDP-50	FIDP-55	FIDP-65	FIDP-75	FIDP-85
Screw Diameter 螺桿直徑 (mm)	45 x 5 sets	50 x 5 sets	55 x 5 sets	65 x 5 sets	75 x 5 sets	85 x 5 sets
Output 產量 (Kg/hr) *	100-200	120-300	150-350	180-450	200-550	220-750
Roller Width 輪寬 (mm)	1200	1350	1650	1850	2200	2800
Power Required 耗電量 (Kw)	120	180	210	270	330	450
Drive Motor 馬達	5 sets	5 sets	5 sets	5 sets	5 sets	5 sets
Five-Layer Co-Extrusion Die 模頭	1 set	1 set	1 set	1 set	1 set	1 set
Machine Dimension 機械尺寸 (m)	8.5 x 7.5 x 8.5	10 x 8.5 x 9	12 x 9 x 10	14 x 9.5 x 11	16 x 10.5 x 11	18 x 12 x 12

7-LAYER CO-EXTRUSION BLOWN FILM MACHINE 七層共擠押吹膜機

MODEL NO. 型號	SIDP-55*2+45*5	SIDP-65*2+55*5	SIDP-75*2+65*5
Screw Diameter 螺桿直徑 (mm)	55 x 2 sets 45 x 5 sets	65 x 2 sets 55 x 5 sets	75 x 2 sets 65 x 5 sets
Output 產量 (Kg/hr) *	100-300	150-450	180-600
Roller Width 輪寬 (mm)	1350	1650	2200
Power Required 耗電量 (Kw)	230	470	580
Drive Motor 馬達	7 sets	7 sets	7 sets
Seven-Layer Co-Extrusion Die 模頭	1 set	1 set	1 set
Machine Dimension 機械尺寸 (m)	16 x 8.5 x 10	20 x 10 x 13	22 x 12 x 17


* Output varies depending on film width, thickness, die size, raw material properties, etc. 產量依膜寬、膜厚、模頭尺寸、原料特性等不同而改變。

※ Application of 5/7-layer film: Agricultural Film, Mulch Film, Laminating Film, Cereal and Dry Food Package, Medical, Barrier Film and Protective Film etc. 五層 / 七層薄膜的應用：農業用膜、覆蓋膜、淋膜用膜、穀物 & 乾燥食品包裝、醫療用膜、阻隔膜及保護膜等。

※ The extruder size configuration can be customized according to production requirements, such as 75+50+50+50+75 or others. The same applies to the 7-layer machine. 五層主機的組合可以根據生產需求進行客製化，如：75+50+50+50+75 等不同的組合，七層主機的組合也可變動。

※ For more detailed specifications, special requirements, and quotations, please kindly contact us. The above specifications are for reference only. The accurate specifications will be based on the official quotation. 詳細的規格、特殊要求 & 報價單，請與我們聯絡。上述規格僅供參考，正確的規格以正式的報價單為主。

4-D Motorized Guiding Cage
4-D 電動安定環

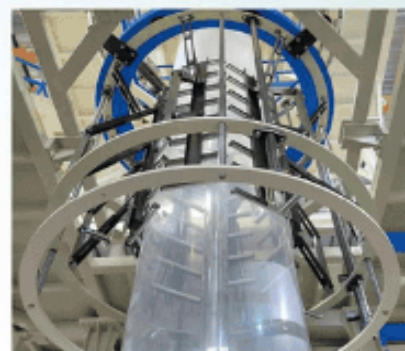

Online film thickness scanner option
可選配線上厚薄偵測系統



Five extruders with IBC and auto thickness control air ring option
五層主機可選配內部冷卻系統和自動厚薄控制風環

