

DOUBLE CAP PAD STUFFING MACHINE

Caps Equipment

Polaris



www.dc-machine.com






DER CHENG MACHINERY CO., LTD.

No. 2-1, Ln. 182, Gongye Rd., Longjing Dist.,

Taichung City 43445, Taiwan

Tel. +886-4-2639-0327 Fax. +886-4-2639-0813

E-mail. sales@dc-machine.com

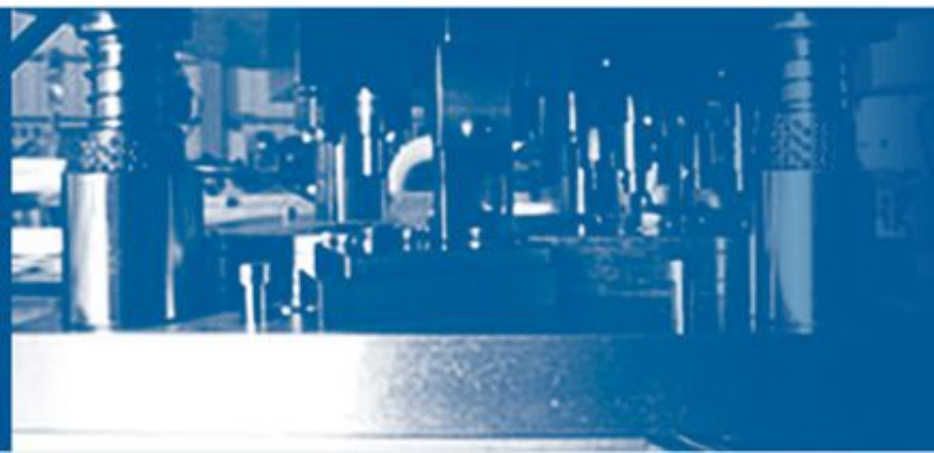

uCloud

FEATURES

- With special mold design, gaskets and gasket pull part can be produced in the same process. The gasket and the aluminum foil are directly stamped to the cap bottom.
- PLC control system with touch human-machine interface.
- The cap contact surfaces are made of stainless steel.



SPECIFICATIONS

Cavity Number	Productivity (pcs/min)
2	200 ↑
3	300 ↑

Cap Application	Productivity (pcs/min)	Units
Cap Diameter	25~ 50	MM
Cap Height	12~ 60	MM



DOUBLE CAP PAD STUFFING MACHINE

Caps Equipment

FUNCTIONS

- This machine is widely used in food and pharmaceutical caps, in which it is needed to insert the double-layer pad (aluminum foil and paper) into the bottom of the caps. The specially designed mold can produce a pull part in the aluminum foil to be easily opened.



DOUBLE CAP PAD STUFFING MACHINE

Caps Equipment



www.dc-machine.com

