


BLISTER PACKING MACHINE

K W - B 2 泡 殼 成 形 自 動 包 裝 機

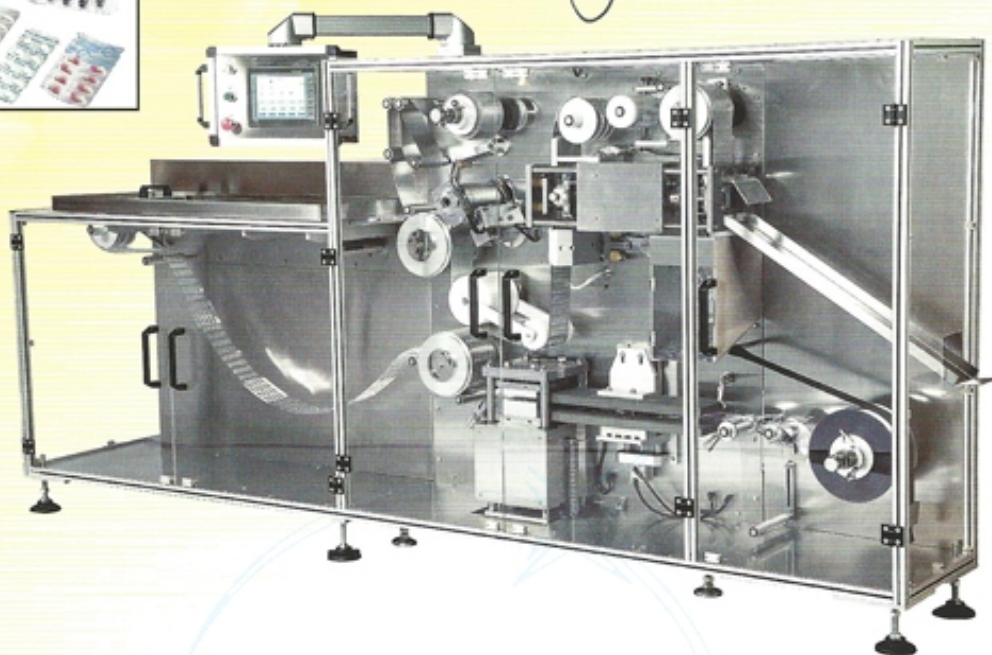

適用範圍：

可適用於錠劑、糖衣 / 膜衣錠、硬膠囊、軟膠囊的PTP包裝，精準的錠劑 / 膠囊自動下料系統及自動檢測系統使得本機全天候運轉只需一人即可。

特性：

1. 本機採連續式的旋轉運動，非間斷式的往復運動，故無衝擊及噪音，運轉流暢。
2. 錠劑包裝可打橫貫的包裝。
3. 採鐵弗龍蒸鍍的加熱板，接觸加熱P.V.C.膜，故加熱溫度較低，加熱材料均勻性較佳，運轉速度較穩定。
4. 本機採SUS 304不銹鋼外殼被覆，保證符合G.M.P.要求標準。
5. 邊對邊的切斷方式，中間沒有材料浪費，至少省6%以上的包材成本。
6. 狀況監視器可顯示停機原因，如P.V.C.鋁箔不足、加熱器障等。
7. 換模調整快速，準備時間包含換模、清潔、調整等，不超過一小時。

規格：

週期時間	最大運轉速度每分鐘 40 週期
P.V.C容量	最大可到 130mm 寬 x 350 micron厚
每片成形面積	最大可到 115 x 65mm
抽拉深度	孔深標準為 12mm
尺寸	2150(長) x 1150(寬) x 1800(高) mm 重量：950kg
電力	220V/240V 3 相 50/60 Hz
能源消耗	4.2kw
空氣	7 cfm @ 70psi

APPLICATIONS:

Suitable for PTP package of pastille, sugar-coated pill/coated pastille, harden capsule, soft capsule. Auto precise feeding system of pastille/capsule and auto testing system could be only one person to operated this machine in the all day.

FEATURES:

1. Continuous roll feeding for low noise and maintenance.
2. Cross perforation of the blister cards.
3. Contact heating of PVC film allows low temperature and uniform blister formation at various machine speeds.
4. No waste/no trimming card cutting feature saves material.
5. Safety indicator lights facilitate trouble shooting.
6. Size changes easily accomplished in less than 20 minutes making this a truly versatile machine.
7. P.I.D. temperature controls for precise blister forming, sealing, perforation and coding.
8. Product feed track allows for manual product feeding if desirable.
9. Includes blister counting controls.
10. Can easily be changed over to handle tablets, capsules and soft gel capsules.
11. Ec speed variable main-motor.

SPECIFICATIONS:

Max. Output	40cycles/indexes per minute
P.V.C. size	Up to130mm wide-350microns
Platen Forming Area	115 x 65mm maximum
Draw Depth	12mm
Dimensions	2150(L) x 1150(W) x 1800(H) mm Weight:950kg
Power	220/240 volts, 3 phase, 50/60Hz
Consumption	4.2kw
Air	7 cfm @ 70psi