

三層共擠押吹膜機

3-LAYER CO-EXTRUSION BLOWN FILM MACHINE



Model Shown:
THDP-50SH6-1000



其陽工業股份有限公司
Chyi Yang Industrial Co., Ltd.

333 桃園縣龜山鄉頂湖三街11號
No.11, Dinghu 3rd St., Guishan Township, Taoyuan County 333, Taiwan
Tel : +886-3-328-8686 Fax : +886-3-328-3737
E-mail : cymw@cymw.com.tw Website : www.chiyiyang.com

三層共擠押吹膜機

3-LAYER CO-EXTRUSION BLOWN FILM MACHINE

● THDP Series

Application of 3-layer film : Agricultural Film, Mulch Film, Laminating Film, Cereal and Dry Food Package, Medical and Protection Film etc.

三層薄膜的應用：農業用膜、覆蓋膜、淋膜用膜、穀物&乾燥食品包裝、醫療及保護膜等。



Model Shown:
THDP-55ST6-1200



其陽工業股份有限公司

Chyi Yang Industrial Co., Ltd.

雙層共擠押吹膜機

2-LAYER CO-EXTRUSION BLOWN FILM MACHINE

● **MDP Series**

Application of 2-layer film : Agricultural Film, Mulch Film, Laminating Film, Courier Bag, Frozen Package etc.

兩層薄膜的應用：農業用膜、覆蓋膜、淋膜用膜、快遞袋、冷凍包裝等。



**Model Shown:
MDP-65ST6-1700**

**Model Shown:
MDP-55STE2-1350**


Can be equipped with A+B+A die
可配備A+B+A模頭




MODEL NO. 型號	MDP-35	MDP-45	MDP-50	MDP-55	MDP-65	MDP-75	MDP-85
Screw Diameter 螺桿直徑 (mm)	35	45	50	55	65	75	85
Output 產量 (Kg/hr) *	25-55	40-80	50-100	60-130	80-170	100-230	150-270
Roller Width 輪寬 (mm)	750	1000	1200	1350	1650	2000	2500
Power Required 耗電量 (Kw)	50	65	80	90	130	160	190
Drive Motor 馬達	2 sets	2 sets	2 sets	2 sets	2 sets	2 sets	2 sets
Die Diameter 模頭	1 set	1 set	1 set	1 set	1 set	1 set	1 set
Machine Dimension 機械尺寸 (m)	7.2 x 2.7 x 6	7.5 x 3 x 6.5	8.5 x 3.5 x 6.5	8.6 x 3.8 x 7	9 x 4.1 x 8	10 x 4.6 x 8	10.5 x 5 x 8.5

MODEL NO. 型號	THDP-45	THDP-50	THDP-55	THDP-65	THDP-75	THDP-85
Screw Diameter 螺桿直徑 (mm)	45 x 3 sets	50 x 3 sets	55 x 3 sets	65 x 3 sets	75 x 3 sets	85 x 3 sets
Output 產量 (Kg/hr) *	50-80	55-100	60-160	100-200	150-270	180-300
Roller Width 輪寬 (mm)	1000	1200	1300	1600	2000	2500
Power Required 耗電量 (Kw)	90	110	130	160	180	210
Drive Motor 馬達	3 sets	3 sets	3 sets	3 sets	3 sets	3 sets
Die Diameter 模頭	1 set	1 set	1 set	1 set	1 set	1 set
Machine Dimension 機械尺寸 (m)	8.8 x 4 x 7	9.5 x 5 x 7.5	9.6 x 5 x 8	10.2 x 5.5 x 8.5	11 x 6 x 9	12.5 x 7 x 12


- Output depending on film width, thickness, die size, raw material feather etc. 產量依膜寬、膜厚、模頭尺寸、原料特性等不同而改變。
- For more details specification, special requirements & quotation, please kindly contact us. The above specifications are for reference, the correct specifications are subject to official quotation. 詳細的規格、特殊要求&報價單，請與我們聯絡。上述規格僅供參考，正確的規格以正式的報價單為主。
- The screw composition of 3-layer is flexible, can be different sizes like 50+55+50 or others. 三層螺桿的組合可以變動，如：50+55+50等不同的組合

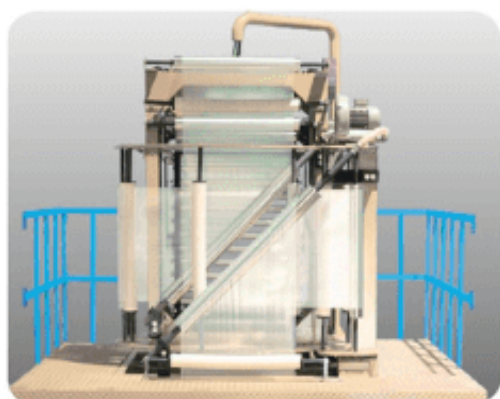

● 360° Oscillating Nip Roller Device (Vertical Type)
360° 上旋轉 (垂直式)

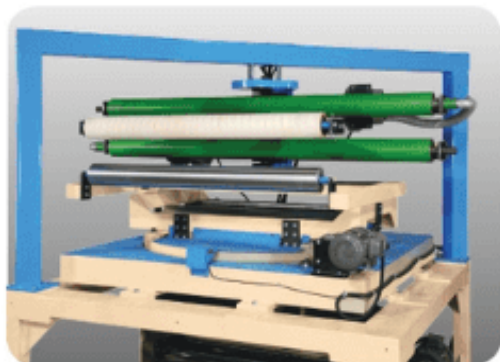

● 360° Oscillating Nip Roller Device (Horizontal Type)
360° 上旋轉 (水平式)

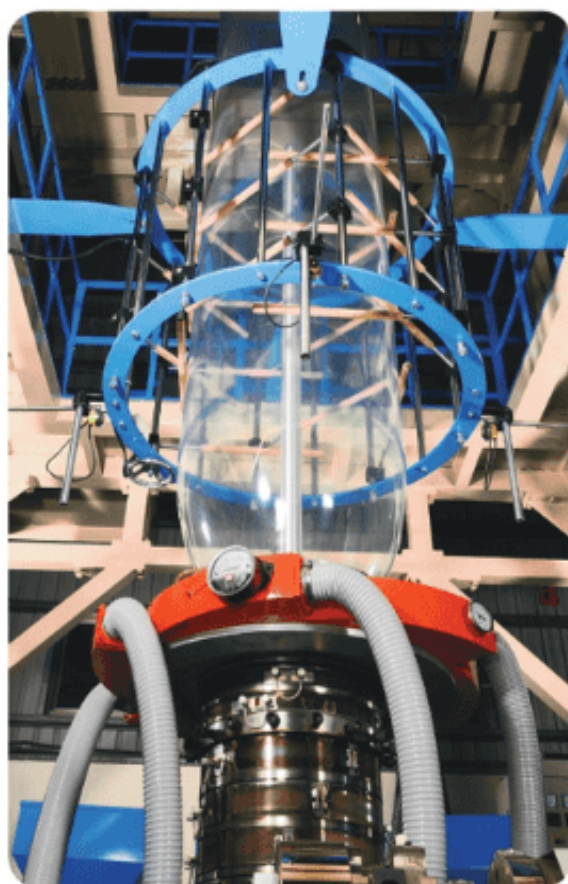

● IBC (Internal Bubble Cooling) 內部冷卻系統