




濕式廢料再生機


WET-TYPE WASTE RECYCLING AND PELLETING MACHINE

SPECIFICATIONS: 規格

型式 MODEL	MGB-RPW-120
適用材質 APPLICABLE MATERIAL	PP HDPE LDPE LLDPE
螺桿直徑 SCREW DIA.	φ120MM
長徑比 L/D RATIO	8:1
最大產量 MAX. OUTPUT	PP 15 - 40KG/H LDPE 12PE 6KG/H - 18KG/H
擠出機馬達 EXTRUDING MOTOR	20HP AC
和風冷卻風扇 COOLING BLOWER	1/4HP x 2
油壓換網裝置 PUMP FOR SCREEN EXCHANGING	2HP
切粒方式 CUTTING TYPE	迴轉式切粒 ROTATIVE CUTTING
切粒馬達 PELLETING MOTOR	1HP
水循環幫浦 PUMP FOR WATER CIRCULATION	2HP
振動馬達 VIBRATING MOTOR	500KG x 4個 (P) x 2
送料及風機 DRAWING MOTOR	2HP
乾燥機容量 CONTAINING CAPACITY OF DRYER	50KG
全日電熱 HEAT REQUIRED	22KW
全日電量 ELECTRIC POWER REQUIRED	65HP
佔地面積 REQUIRED GROUND SPACE	217" x 138" x 100"
裝箱尺寸 MEASUREMENT	150" x 86" x 86"
機械重量 N.W.	3100 KGS
裝箱重量 G.W.	3500 KGS



MODEL: MGB-RPW-120

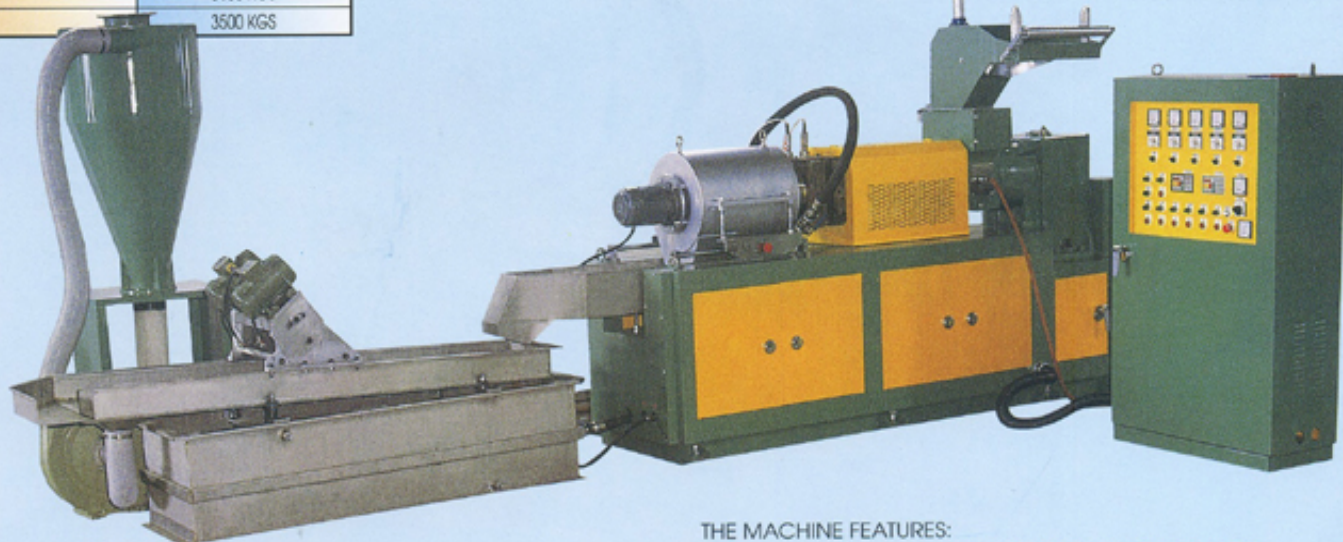

機械特色:

- 本機適合PP、HDPE、LDPE、LLDPE的廢料處理。
- 各種廢料不須經過粉碎機粉碎，可直接將廢料放入入口口。機械特殊設計，可直接將工作物直接粉碎，進而製粒。
- 操作簡易，只要將各類工作物溫度設定好後，待溫度全部到達所設定之溫度後（再延後約二十分~三十分）再開始操作。
- 本機備有油壓式換網裝置，所以換網簡易又快速。
- 本機切料桶設有水沖式設備，迅速將所有切出來的粒料經水迅速冷卻，使製品不容易黏在一起。
- 本機備有振盪式濾水槽設備，將粒料及水迅速分離。
- 本機備有乾燥機設備，可將粒料完全乾燥，將水份完全清除。
- 本機備有入料加壓氣缸，可增加產能。

THE MACHINE FEATURES:

- THIS MACHINE IS SUITABLE FOR THE RECYCLING TREATMENT FOR PP, HDPE, LDPE AND LLDPE WASTE MATERIAL.
- WASTE MATERIAL MAY DIRECTLY BE PITCHED INTO THE INLET WITHOUT PRECEDING SMASH TREATMENT IN A CRUSHER. THE SPECIAL DESIGNED CONSTRUCTION WILL DIRECTLY SMASH WASTE MATERIAL AND DO PELLETING.
- IT IS EASY FOR OPERATION. JUST NEED TO PRESET THE REQUIRED TEMPERATURE IN ADVANCE FOR EACH HEATER AS PER THE CHARACTER OF MATERIAL AND THEN TO AWAIT THE HEATERS TO WARM UP WHEN ALL OF TEMPERATURE GAUGES REACH THE PRESET. JUST WAIT FOR ANOTHER 20-30 MINUTES AND THEN TO START OPERATION.
- THIS MACHINE EQUIPS WITH A HYDRAULIC SCREEN EXCHANGING DEVICE TO ENABLE THE EXCHANGING ACTION TO BE EASY AND QUICK.
- THE PELLETING BARREL EQUIPS WITH WATER FLUSHING UNIT WHICH WILL QUICKLY COOL DOWN THE PRODUCED PELLETS BY WATER AND MIGHT AVOID THEM STICKING TO EACH OTHER.
- THIS MACHINE EQUIPS WITH VIBRATIVE FILTERING DEVICE TO SEPARATE THE PELLETS FROM WATER QUICKLY.
- THIS MACHINE EQUIPS WITH DRYING DEVICE TO DRAIN AND DRY THE PELLETS COMPLETELY.
- THIS MACHINE EQUIPS WITH IN-FEED PNEUMATIC PRESSING CYLINDER TO INCREASE PRODUCTION CAPACITY.



銘機實業股份有限公司 廠址：台南縣山上鄉明和村北勢洲83號
MING JILEE ENTERPRISE CO., LTD.

No.83, PEI-SHIN-CHAU, MING-HO TSUN, SHAN-SHANG SHIANG, TAINAN HSIEN, TAIWAN.
TEL:886-6-5783420 FAX:886-6-5783347 E-MAIL: mingjile@ms 27. hinet. net