




MGA-47-500

BUBBLE ENVELOPE MAKING MACHINE


氣泡布信封袋封切機

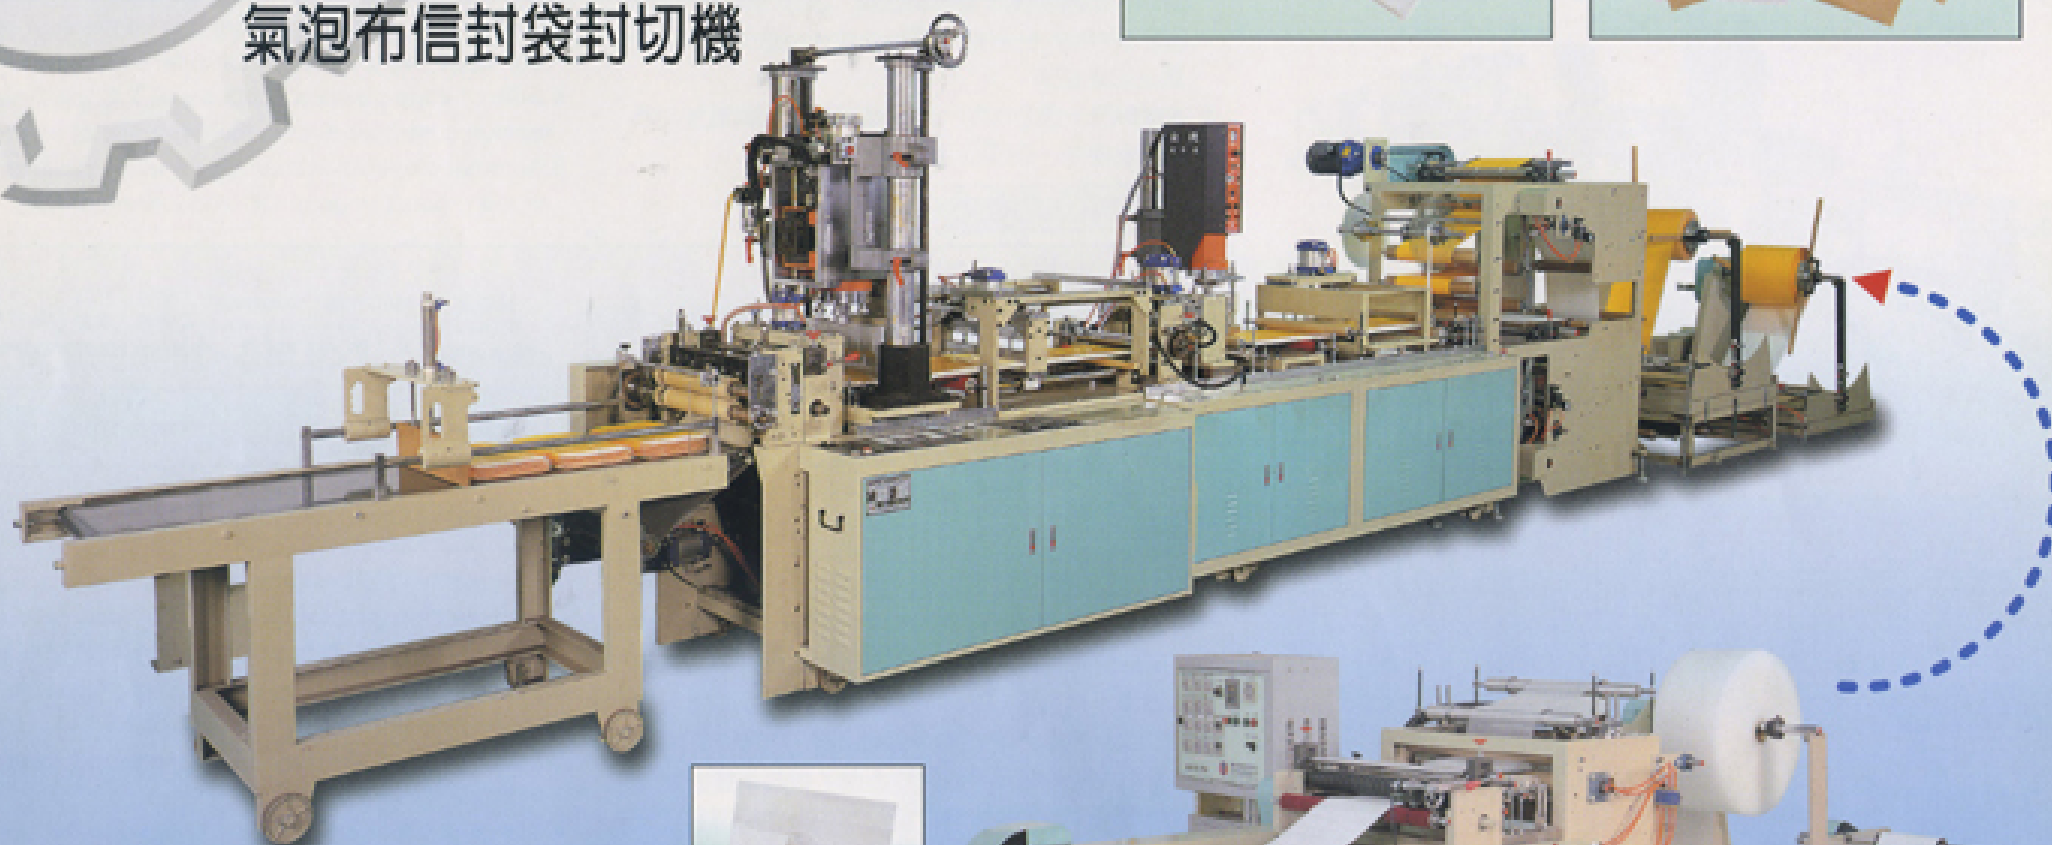

MGA-47B-700

AUTO LAMINATING AND REWINDING MACHINE


自動噴膠貼合氣泡布捲取機



MGA-47-500

BUBBLE ENVELOPE MAKING MACHINE

氣泡布信封袋封切機

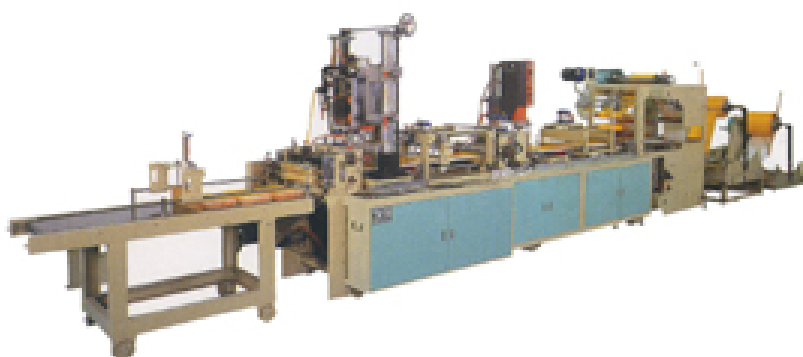

機械特性：

- 1.本機是針對合成紙信封袋及牛皮紙信封袋所設計之全自動化製造機。
- 2.採用滾珠導螺桿送料配合伺服馬達電腦數值控制，及印刷電眼可裁切多種長度之信封袋。
- 3.寬度及底部均使用超音波發熱熔接，封口牢靠，不溢膠，不同袋長只需更換底模，操作方便。
- 4.每組放料架均使用EPC邊緣追蹤器及張力控制，故產品均能整齊。
- 5.本機採用全自動控制，再生產過程中全副監控材料及產品品質，使產品達到世界水平。

SPECIFICATION:

型 式 MODEL	有效剪取 MAX-CUTTING SIZE (W×L)mm	每分鐘產量 PRODUCTION PER MIN. (PC)	動 力 MOTOR	超音波	總電量 POWER REQUIRED	機 械 MACHINE			裝箱容量 MEASUREMENT			機板 重量 N.W.	裝箱 毛重 G.W.	備 考 REMARK
						長 L	寬 W	高 H	長 L	寬 W	高 H			
MGA-47-500	450×350	20~40	6HP	3200W×1台 2600W×1台	12.0KW	405"	51"	81"	125"	60"	75"	3000KG	3200KG	


The Machine Features :

- 1.This automatic machine is designed especially to PE and craft paper bubble Envelop.
- 2.The feeding device is by ball leading screw with pneumatic sheet.The size control by servo motor & digital compute with photo-eye for length control.
- 3.It is firmed and non-glued by ultrasonic machine of sealing in side and bottom.It is convenient operating to change the die bottom for different length of bag.
- 4.Both of edge position controller(E.P.C.)plus manual tension controller enable the edge line of bag to be trim.
- 5Automatic operation throughout every process let all the product in good QC and under control.

MGA-47B-700

AUTO LAMINATING AND REWINDING MACHINE

自動噴膠貼合氣泡布捲取機

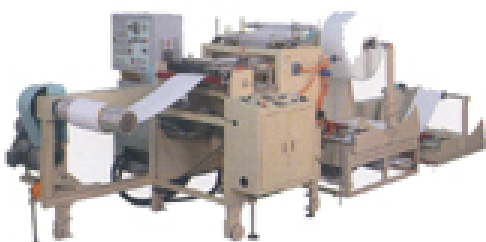

機械特性：

- 1.本機專為熱熔膠貼合設計，可使用各種材料如紙張、合成紙、珠異膜、PP膜、PE膜等...
- 2.自動熱熔膠機採全自動控制，使膠塗佈均勻，寬度、厚薄一致。
- 3.每組放料架均使用EPC邊緣追蹤器，故產品均能整齊。
- 4.原料軸採用氣壓軸，使操作方便，提高產量。
- 5.本機採用全自動計米、計速控制使操作及調整方便，降低廢料量。

The Machine Features :

- 1.This machine is designed especially to attach the heat-welding glue for every kind of material such as craft paper, synthetic paper and film of PP, PE etc.
- 2.This machine with automatic control made the glue even complete in width and thickness.
- 3.Each material stand with E.P.C. enable the edge line of product to be trim.
- 4.It is convenient and efficient to operate the raw material device by pneumatic shaft.
- 5.With auto-meter to be easily control and adjust; to be avoid the waste material.

SPECIFICATION:

MODEL	MGA-47B-700
有效工作寬度 EFFECTIVE WIDTH	600MM
膠塗佈 SPEED	15-20MM/MIN
送料馬達 FEEDING MOTOR	1HP
噴膠馬達 GLUE MOTOR	0.5KG-M
全副電量 POWER REQUIRED	12KW
佔地面積 MACHINE SIZE	244"×80"×77"
裝箱容量 MEASUREMENT	84"×50"×125" set 125"×45"×100"
淨重 N.W	1900kg
毛重 G.W	2200kg



銘機實業股份有限公司

台南縣山上鄉明和村北勢洲83號
TEL: 886-6-5783420
傳真: 886-6-5783347
NO. 83 PEI-SHIN-CHAU, MING-440 TSUN, SHAN-SHANG
SHIANG, TAINAN, HSIEN, TAIWAN.
TEL: 886-6-5783420 FAX: 886-6-5783347
E-MAIL: mingjie@ms27.hinet.net
網址WEBSITE: http://www.mingjilee.com/

銘富實業股份有限公司

台南縣新市鄉大社村552-2號
TEL: 886-6-5990498, 5991037
傳真: 886-6-5890535
NO. 552-2 TA-SHE VILLAGE
ESIN SHIN SHIANG TAINAN HSIEN TAIWAN
TEL: 886-6-5990498, 5991037
FAX: 886-6-5890535
網址WEBSITE: http://www.mingjilee.com/